
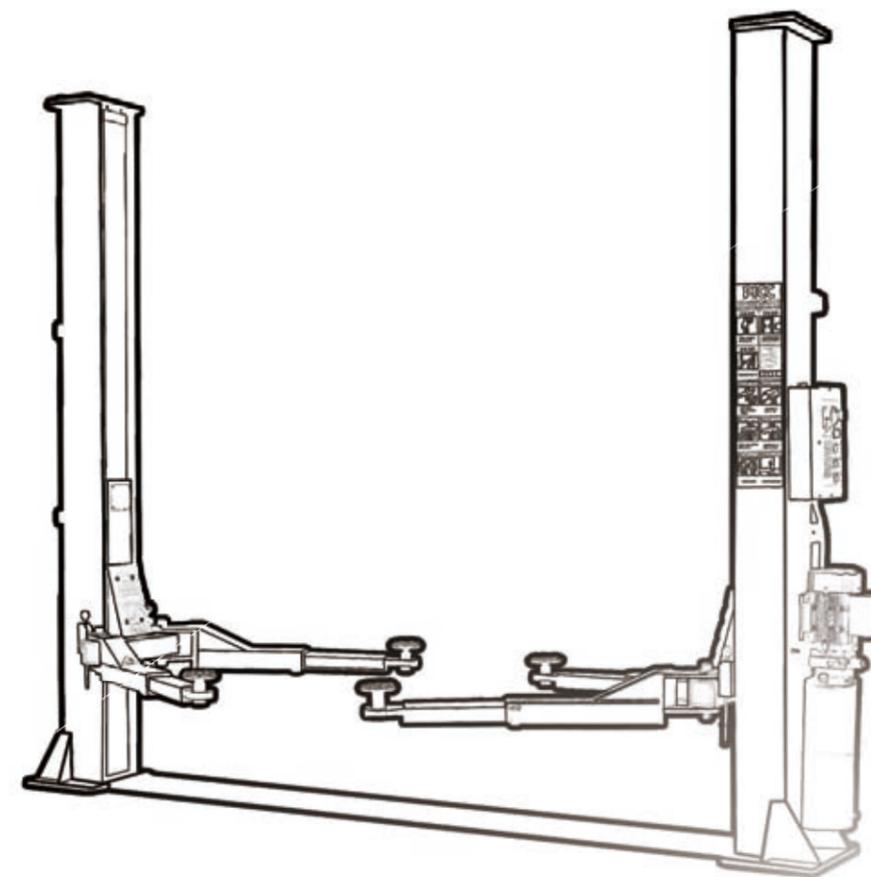


---

# VEHICLE LIFT

举升机

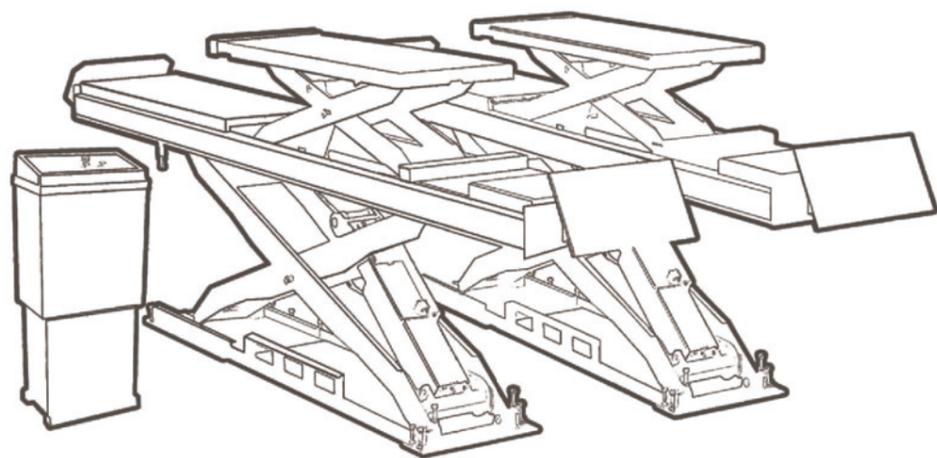

# U-T40 U-T40E

## Floor Cover Plate Two Post Vehicle Lift 底板双柱举升机




(CE: ONLY FOR U-T40E)

### U-T40



Dual manual  
Lock Release  
双边手动解锁

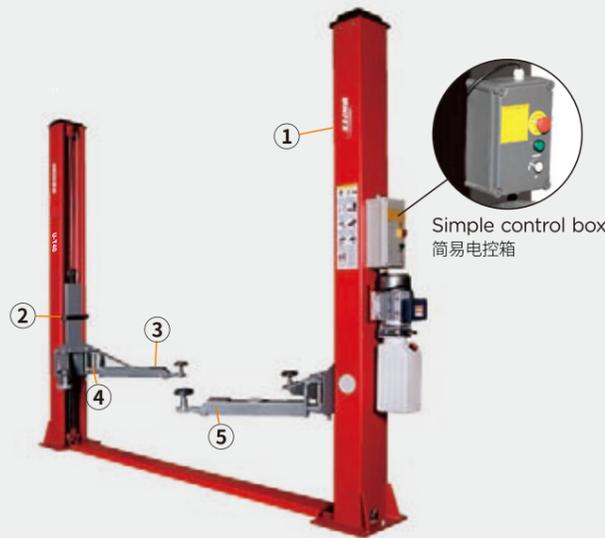

Simple control box  
简易电控箱

### U-T40E



Electric Lock  
Release  
电动解锁  
Electromagnetic  
Lowering  
电磁下降



Make according to CE norms  
按照CE标准制造

## SAFETY FEATURES 安全特点




① Height limit  
switch  
上限位开关




② Car door protection  
车门保护垫



③ Arm pad  
托臂垫



④ Automatic all-steel  
arm-locking device  
全自动全钢锁臂装置



⑤ Foot Protection  
Device  
防压脚装置



Dual hydraulic  
cylinders  
双液压缸设置



Safety valve for  
anti-explosion of  
hydraulic system  
安全阀加强安全保护



Synchronization  
cables  
同步钢丝绳



Chain protector  
防脱链装置



Easy access grease  
nipple design  
外置润滑油加注口



Dust protection  
防尘布

### STANDARD 标准配置



Aluminum motor  
铝电机, 耐用, 散热好



Adjustable lifting  
pad to three(3)  
heights  
可调橡胶托垫3节高度




Two stage arms  
2节臂



Adapters  
增高柱




Optional: Adapters  
(选配) 增高柱



Optional: three  
stage arms  
(选配) 3节臂

## DIMENSION 尺寸参数

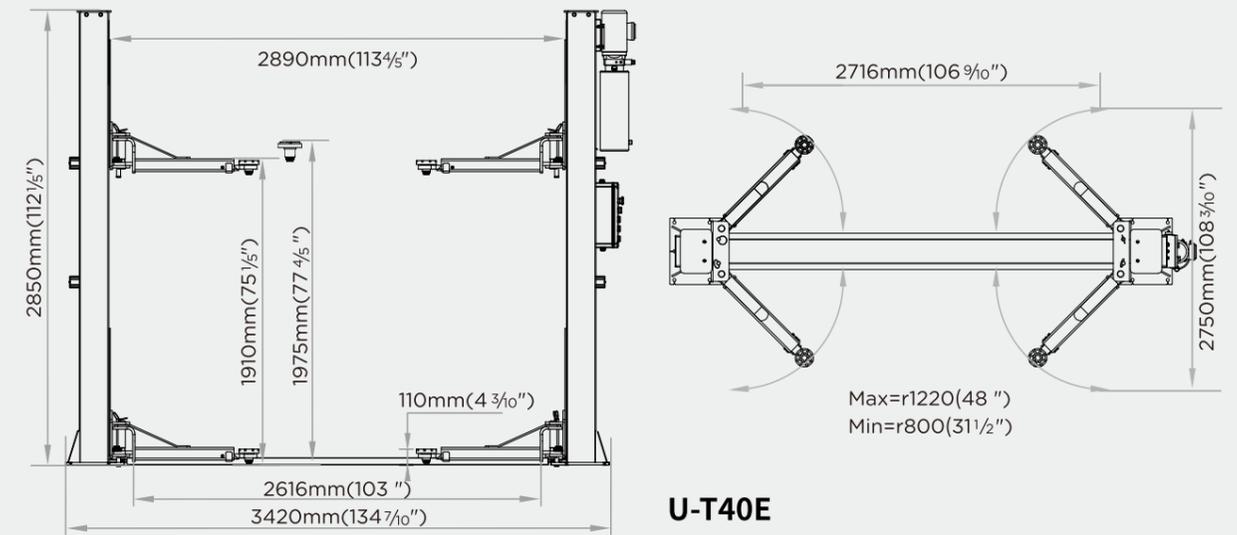

## TECHNICAL DATA 技术参数

MODEL 型号	U-T40	U-T40E
Capacity 举升重量	4.0 Ton	4.0 Ton
Lifting height 举升高度	1910mm(75 1/5")	1910mm(75 1/5")
Min height 托臂高度	110mm(4 3/10")	110mm(4 3/10")
Max car width 通车宽度	2616mm(103")	2616mm(103")
Power supply 电源功率	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW
Shipping Information 装运信息	Loading QTY : 30 units/20' CTNR 2940*455*670mm (628 kg/units)	Loading QTY : 30 units/20' CTNR 2940*455*750mm (628 kg/units)

# U-T40A U-T40EA


Arch Type Clear Floor Two Post Vehicle Lift  
龙门双柱举升机



(CE: ONLY FOR U-T40EA)

## U-T40A

Dual manual  
Lock Release  
双边手动解锁

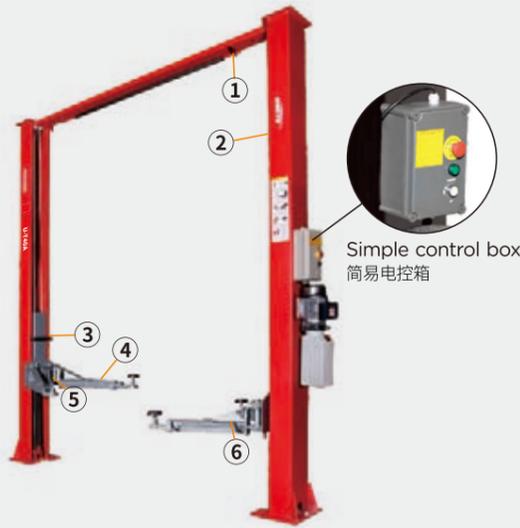

Simple control box  
简易电控箱

## U-T40EA

Electric Lock  
Release  
电动解锁  
Electromagnetic  
Lowering  
电磁下降



Make according to  
CE norms  
按照CE标准制造

## SAFETY FEATURES 安全特点



① Top beam design  
车顶防撞设计



② Height limit  
switch  
上限位开关




③ Car door protection  
车门保护垫



④ Arm pad  
托臂垫



⑤ Automatic all-steel  
arm-locking device  
全自动全钢锁臂装置



⑥ Foot Protection  
Device  
防压脚装置



Dual hydraulic  
cylinders  
双液压缸设置



Safety valve for  
anti-explosion of  
hydraulic system  
安全阀加强安全保护



Synchronization  
cables  
同步钢丝绳



Chain protector  
防脱链装置



Easy access grease  
nipple design  
外置润滑油加注口



Dust protection  
防尘布

## STANDARD 标准配置



Aluminum motor  
铝电机, 耐用, 散热好



Adjustable lifting  
pad to three(3)  
heights  
可调橡胶托垫3节高度




Two stage arms  
2节臂



Adapters  
增高柱  
4 PCS




Optional: Adapters  
(选配) 增高柱  
4 PCS



Optional: three  
stage arms  
(选配) 3节臂

## DIMENSION 尺寸参数

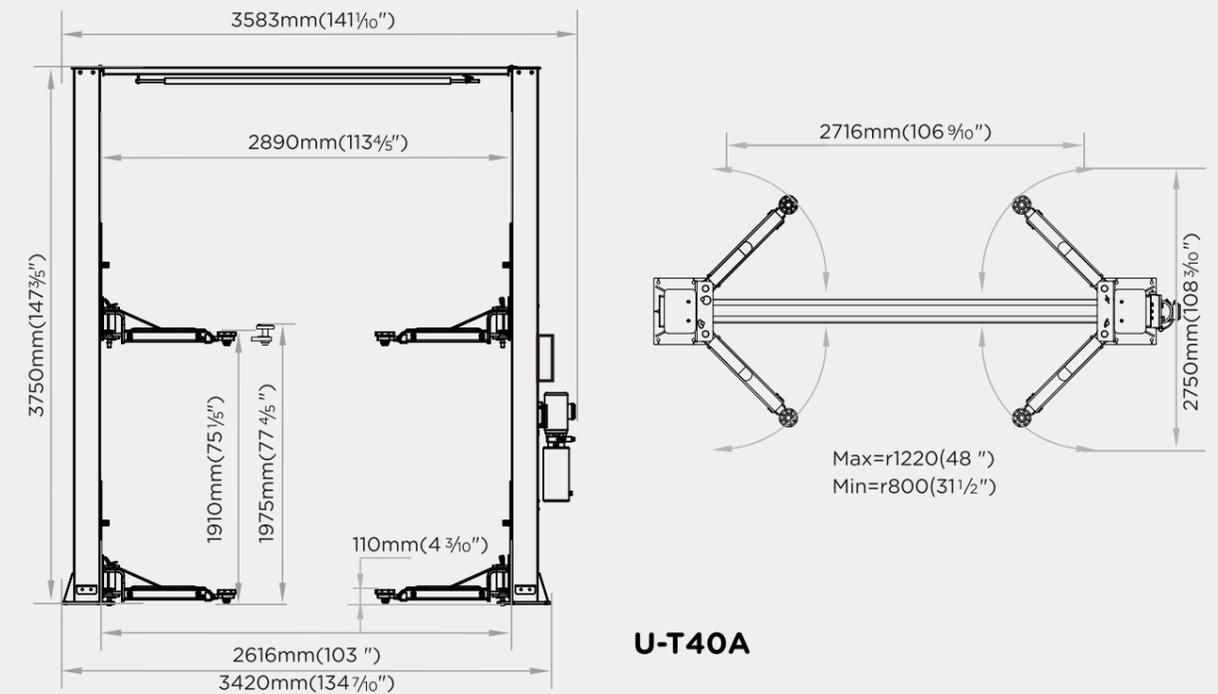

## TECHNICAL DATA 技术参数

MODEL 型号	U-T40A	U-T40EA
Capacity 举升重量	4.0 Ton	4.0 Ton
Lifting height 举升高度	1910mm(75 1/5")	1910mm(75 1/5")
Min height 托臂高度	110mm(4 3/10")	110mm(4 3/10")
Max car width 通车宽度	2616mm(103")	2616mm(103")
Power supply 电源功率	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW
Shipping Information 装运信息	Loading QTY : 15 units/20' CTNR 3680*450*703mm ( 657 kg/units)	Loading QTY : 15 units/20' CTNR 3840*455*750mm ( 660 kg/units)


# U-T40B U-T40EB

Arch Type Clear Floor Two Post Vehicle Lift  
龙门双柱举升机




(CE: ONLY FOR U-T40EB)


## U-T40B

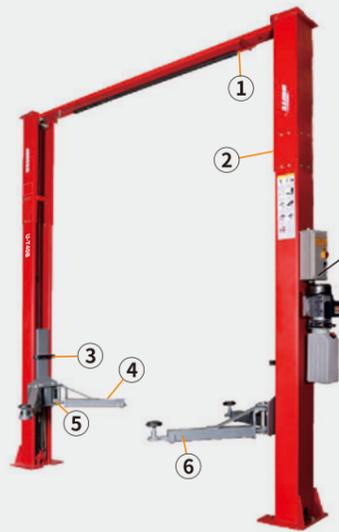


## U-T40EB

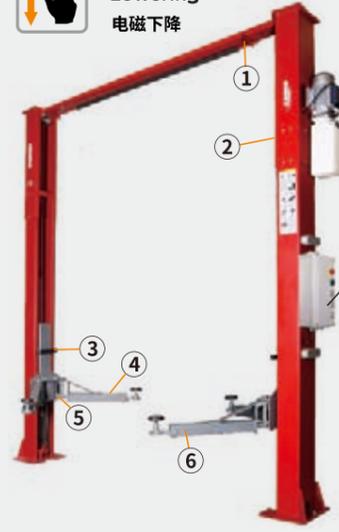



## SAFETY FEATURES 安全特点



## STANDARD 标准配置



## DIMENSION 尺寸参数

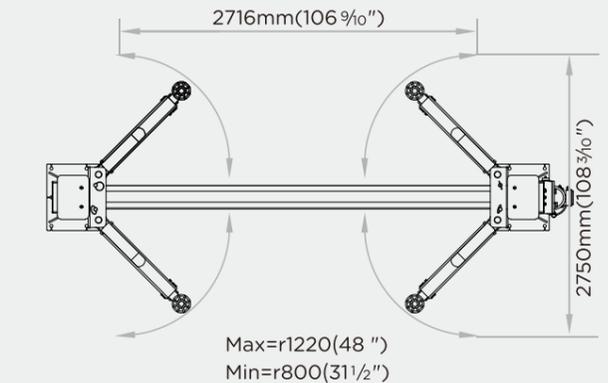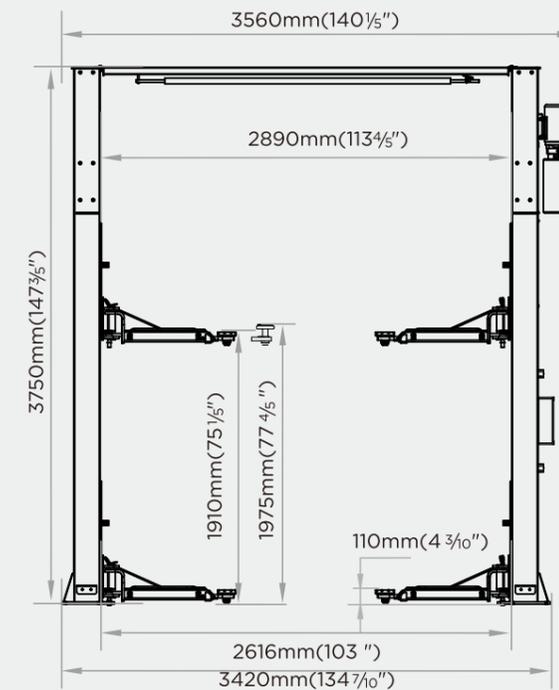

U-T40EB

## TECHNICAL DATA 技术参数

MODEL 型号	U-T40B	U-T40EB
Capacity 举升重量	4.0 Ton	4.0 Ton
Lifting height 举升高度	1910mm(75 1/5 ")	1910mm(75 1/5 ")
Min height 托臂高度	110mm(4 3/10 ")	110mm(4 3/10 ")
Max car width 通车宽度	2616mm(103 ")	2616mm(103 ")
Power supply 电源功率	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW
Shipping Information 装运信息	Loading QTY : 30 units/20' CTNR 2930*455*750mm (682 kg/units)	Loading QTY : 30 units/20' CTNR 2940*450*750mm (682 kg/units)

# U-T40EF

True Asymmetric Clear Floor Two Post Vehicle Lift  
龙门式双柱举升机



## U-T40EF



Electric Lock Release  
电动解锁



Electromagnetic Lowering  
电磁下降



Make according to CE norms  
按照CE标准制造

## SAFETY FEATURES 安全特点




① Allow full door open with asymmetric column design  
非对称式设计, 保证车门的打开角度



② Top beam design  
车顶防撞设计



③ Height limit switch  
上限位开关



④ Foot Protection Device  
防压脚装置



Reverse pulling cylinder  
倒置油缸设置



Safety valve for anti-explosion of hydraulic system  
安全阀加强安全保护



Synchronization cables  
同步钢丝绳



High strength safety lock  
高强度安全锁

## STANDARD 标准配置



Aluminum motor  
铝电机, 耐用, 散热好



Adjustable lifting pad to three(3) heights  
可调橡胶托垫3节高度



Three stage arms & Two stage arms  
3节臂 & 2节臂




Adapters  
增高柱



Optional:Adapters  
(选配) 增高柱

## DIMENSION 尺寸参数

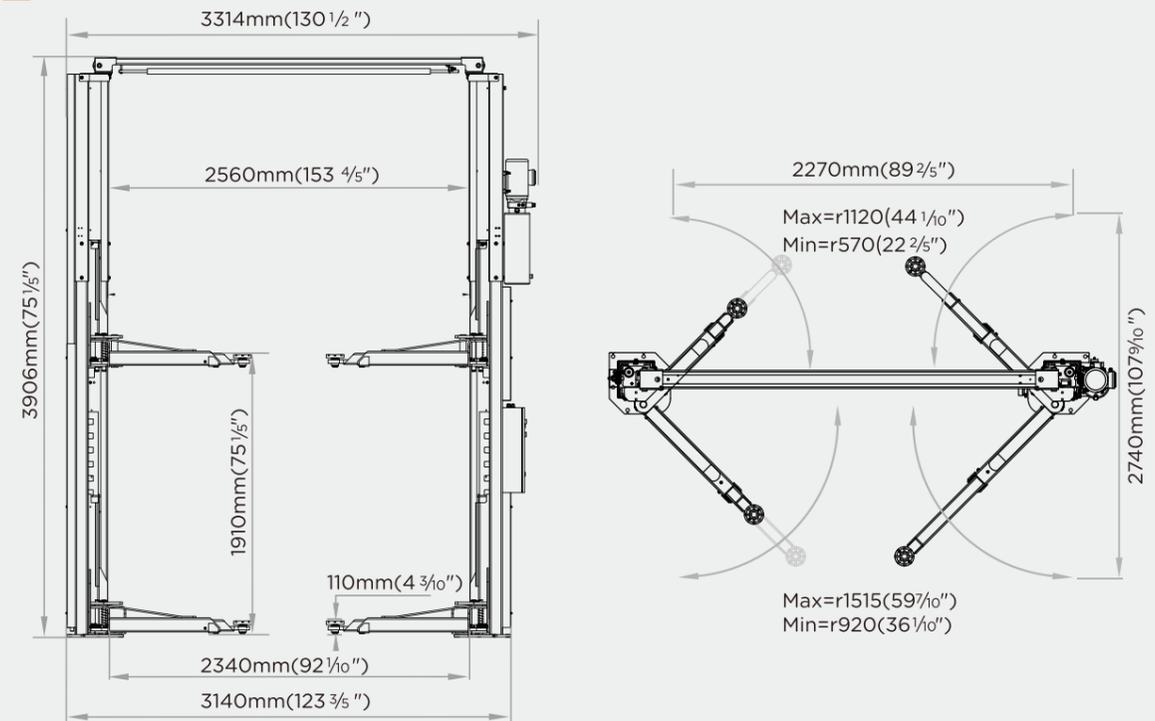

## TECHNICAL DATA 技术参数

MODEL 型号	U-T40EF
Capacity 举升重量	4.0 Ton
Lifting height 举升高度	1910mm(75 1/5")
Min height 托臂高度	110mm(4 3/10")
Max car width 通车宽度	2340mm(92 1/10")
Power supply 电源功率	220V/380V 50Hz 3PH 3.0kw
Shipping Information 装运信息	Loading QTY : 24 units/20' CTNR 2940*720*520mm (732 kg/units)

# U-T50E

## Floor Cover Plate Two Post Vehicle Lift 底板双柱举升机



### U-T50E



Make according to CE norms  
按照CE标准制造


### SAFETY FEATURES 安全特点




① Height limit switch  
上限位开关




② Car door protection  
车门保护垫



③ Arm pad  
托臂垫



④ Automatic all-steel arm-locking device  
全自动全钢锁臂装置



⑤ Foot Protection Device  
防压脚装置



Dual hydraulic cylinders  
双液压缸设置



Safety valve  
安全阀




Synchronization cables  
同步钢丝绳



Chain protector  
防脱链装置



Easy access grease nipple design  
外置润滑油加注口



Dust protection  
防尘布


### STANDARD 标准配置



Aluminum motor  
铝电机, 耐用, 散热好



Adjustable lifting pad to two(2) heights  
可调橡胶托垫2节高度



Three stage arms  
3节臂

### OPTIONAL 可选配置




Optional:Adapters  
(选配) 增高柱



Optional:Adapters  
(选配) 增高柱

### DIMENSION 尺寸参数

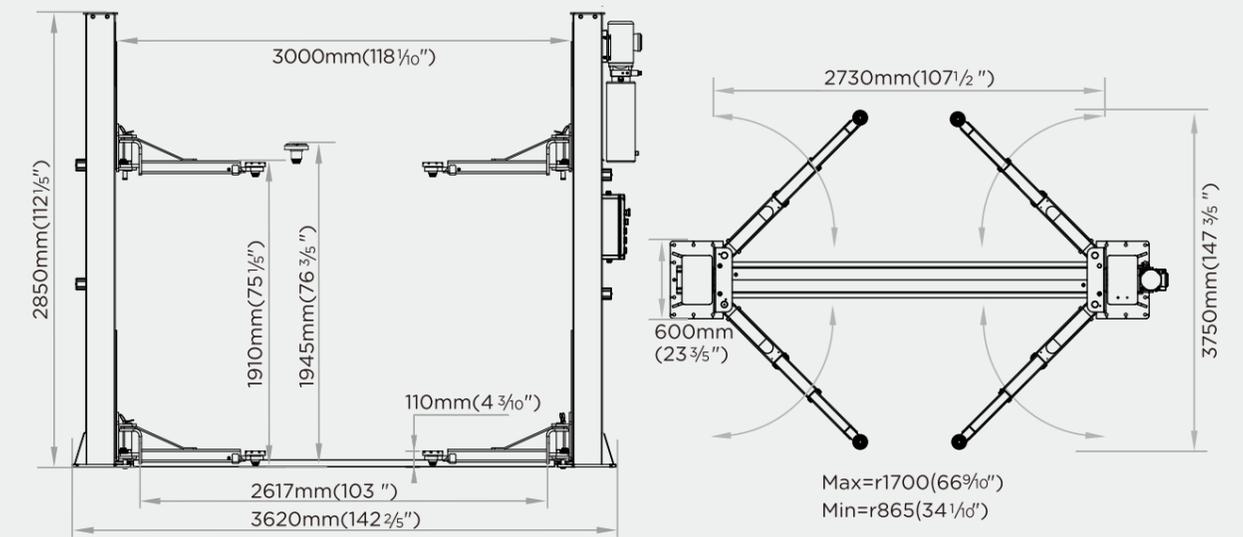

### TECHNICAL DATA 技术参数

MODEL 型号	U-T50E
Capacity 举升重量	5.0 Ton
Lifting height 举升高度	1910mm(75 1/8")
Min height 托臂高度	110mm(4 3/16")
Max car width 通车宽度	2617mm(103")
Power supply 电源功率	220V/380V 50Hz 3PH 3.0kw
Shipping Information 装运信息	Loading QTY : 12 units/20' CTNR 2881*998*612mm (1031 kg/units)

# U-T60EB

## Arch Type Clear Floor Two Post Vehicle Lift

龙门双柱举升机



### U-T60EB

Electric Lock Release  
电动解锁

Electromagnetic Lowering  
电磁下降



Make according to CE norms  
按照CE标准制造

### SAFETY FEATURES 安全特点



① Top beam design  
车顶防撞设计




② Height limit switch  
上限位开关



③ Car door protection  
车门保护垫



④ Arm lock engaged automatically when lifting  
升降时自动锁紧托臂



⑤ Foot Protection Device  
防压脚装置



Dual hydraulic cylinders  
双液压缸设置



Safety valve for anti-explosion of hydraulic system  
安全阀加强安全保护




Synchronization cables  
同步钢丝绳



Chain protector  
防脱链装置



Easy access grease nipple design  
外置润滑油加注口



Dust protection  
防尘布


### STANDARD 标准配置



Aluminum motor  
铝电机, 耐用, 散热好



Adjustable lifting pad to two(2) heights  
可调橡胶托垫2节高度




Three stage arms  
3节臂

### OPTIONAL 可选配置




Optional:Adapters  
(选配) 增高柱



Optional:Adapters  
(选配) 增高柱

### DIMENSION 尺寸参数

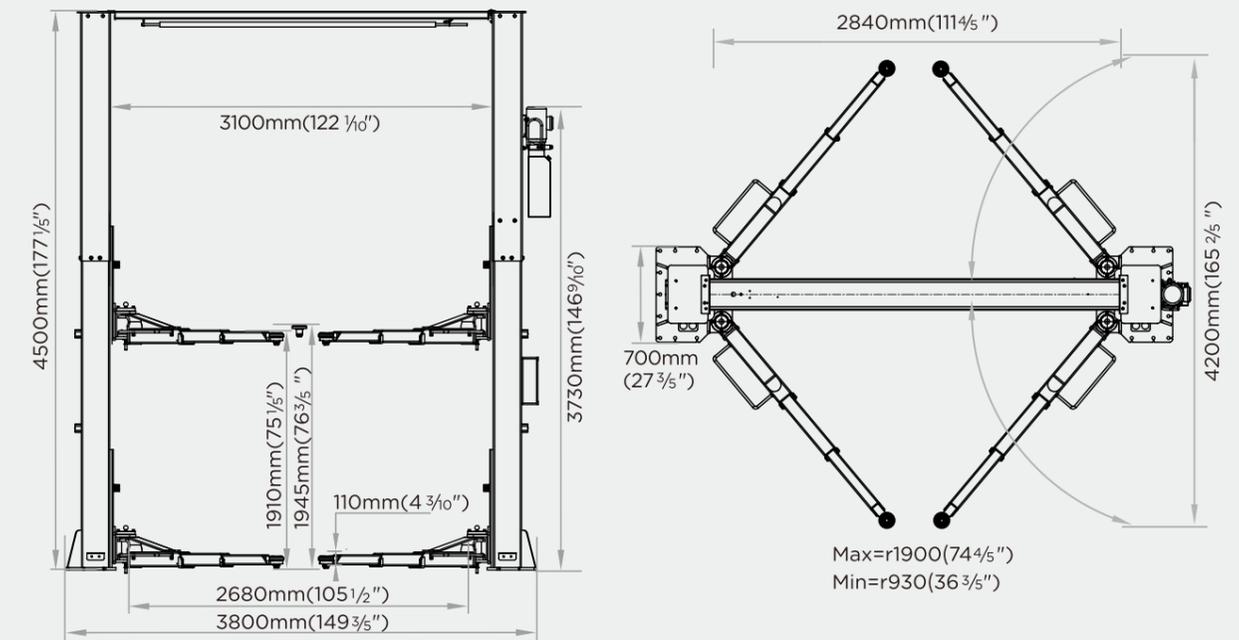


### TECHNICAL DATA 技术参数

MODEL 型号	U-T60EB
Capacity 举升重量	6.0 Ton
Lifting height 举升高度	1910mm (75 1/8")
Min height 托臂高度	110mm (4 3/16")
Max car width 通车宽度	2680mm (105 1/2")
Power supply 电源功率	220V/380V 50Hz 3PH 3.0kw
Shipping Information 装运信息	Loading QTY : 12 units/20' CTNR 2900*712*1110mm (1431 kg/units)

# U-P35/P45/P55

## Service Straight Platform Scissor Lift

平板大剪举升机

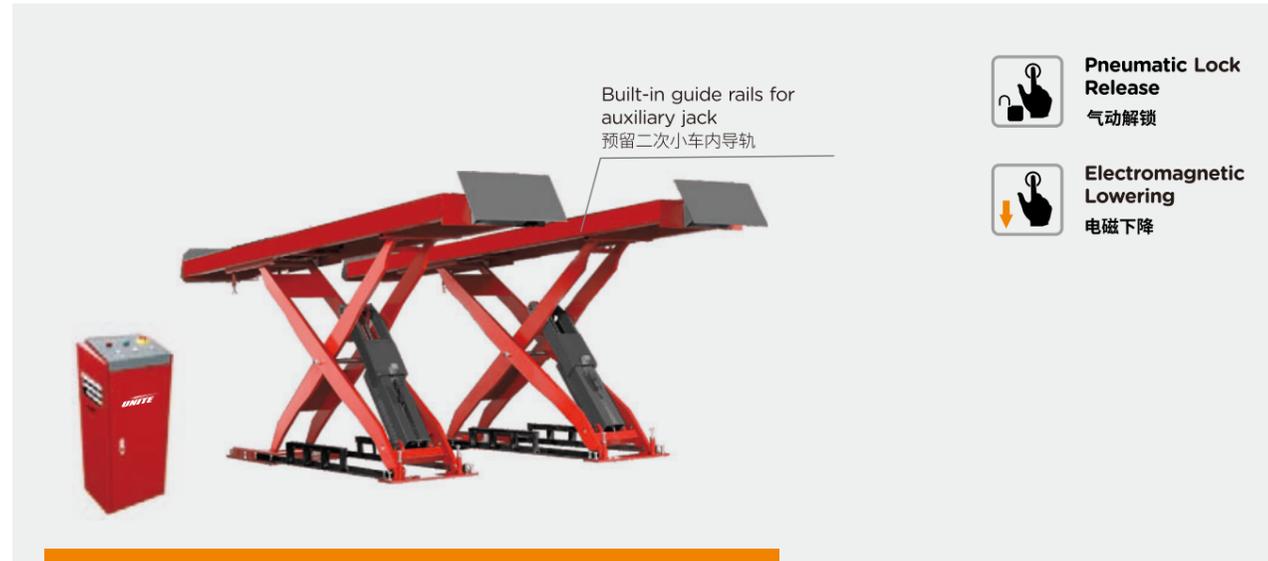

Built-in guide rails for auxiliary jack  
预留二次小车内导轨

- Pneumatic Lock Release**  
气动解锁
- Electromagnetic Lowering**  
电磁下降

### Rolling jack (OPTIONAL)

#### 二次小车 (可选配置) 2T/3T

Convenient for clients' self-installation  
方便客户自行安装



Manual Control  
手动小车



Pneumatic Control  
气动小车



Electric Control  
电动小车

P35 P45 --U-X20TD/X20TS/X20TQ, P55 --U-X30TD/X30TS/X30TQ  
P35 P45 推荐U-X20TD/X20TS/X20TQ, P55 推荐U-X30TD/X30TS/X30TQ

### OPTIONAL

#### 可选配置



Photoelectric switch  
光电水平



LED Lighting  
LED灯条照明

### SAFETY FEATURES 安全特点



Precision machined double sided safety teeth design  
独特双边安全锁齿设计



Safety descending stop & alarm  
二次下降, 近地骤停  
警报提示




Safety valve for anti-explosion of hydraulic system  
安全阀加强安全保护



Height limit switch  
高度限位开关

### DIMENSION 尺寸参数

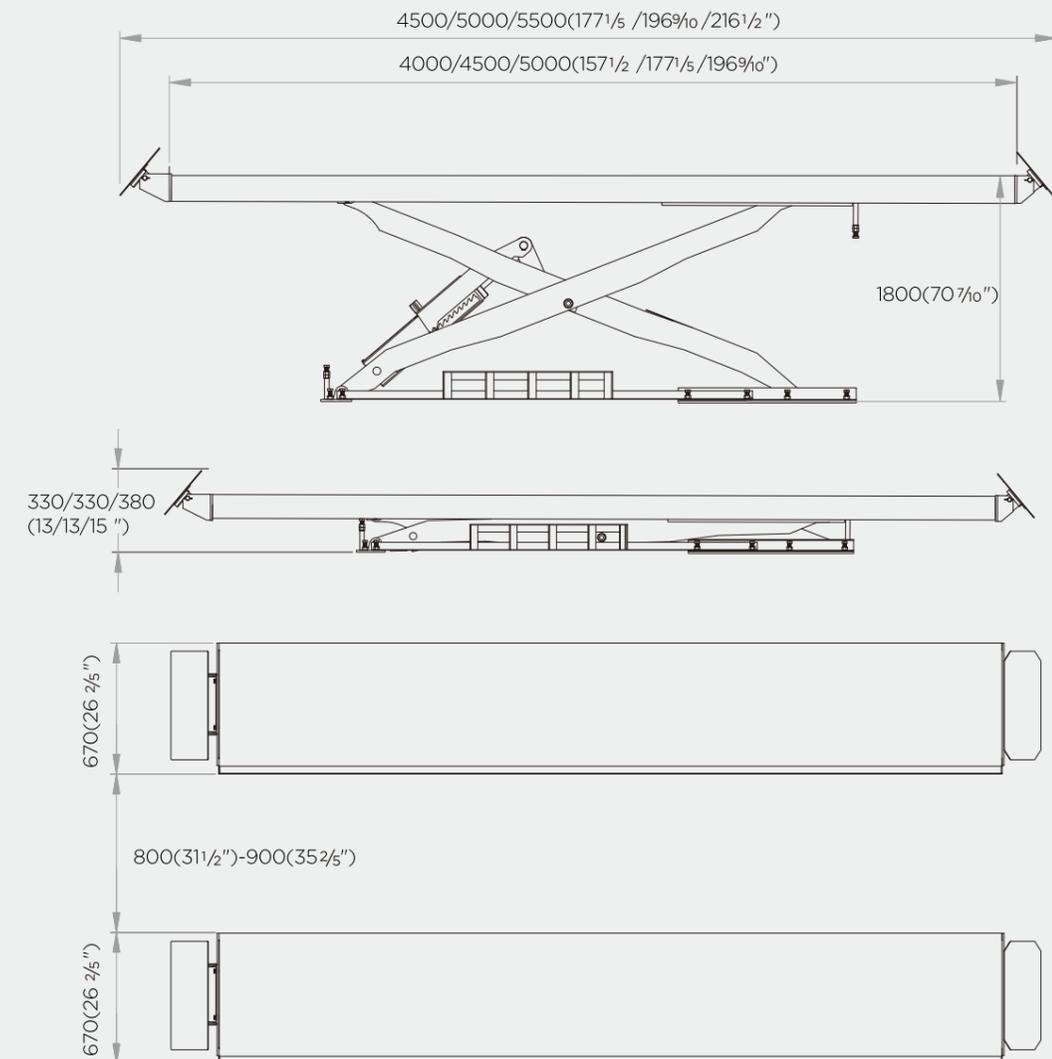

### TECHNICAL DATA 技术参数


MODEL 型号	U-P35 / P45	U-P55
Capacity 举升重量	3.5 Ton / 4.5 Ton	5.5 Ton
Lifting height 举升高度	1800mm(70 7/16")	1800mm(70 7/16")
Min height 平台高度	330mm(13")	380mm(15")
Platform length 平台长度	4000mm(127 1/2") / 4500mm(177 1/8")	5000mm(196 9/16")
Power supply 电源功率	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW

# U-C35/C45/C55



## Wheel Alignment Scissor Lift

单层四轮定位大剪举升机

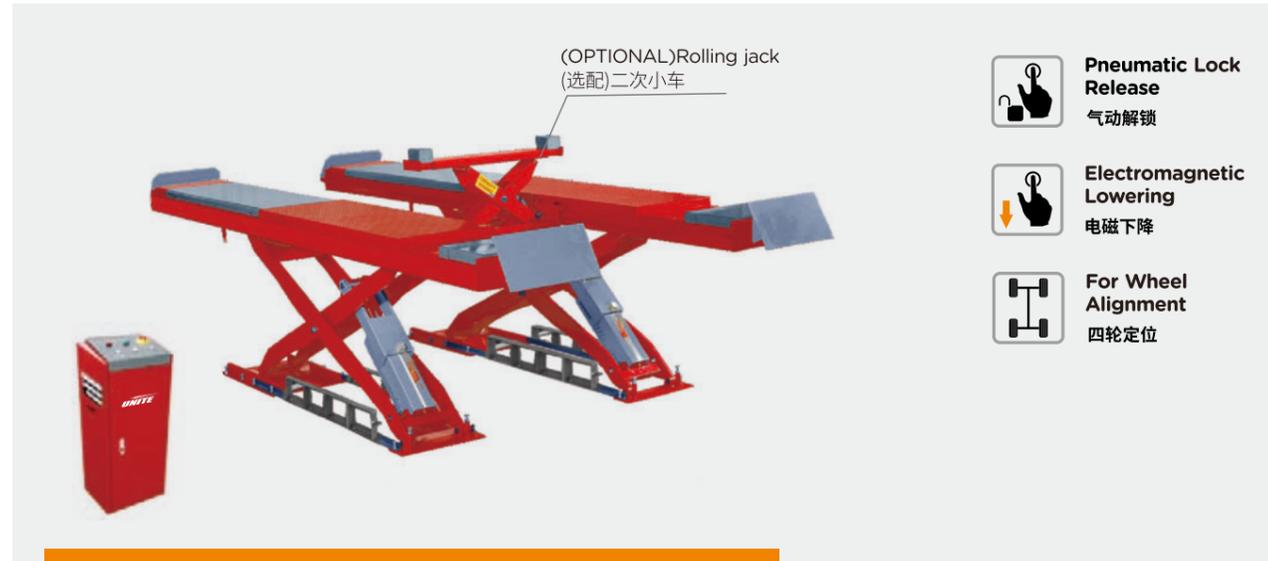

(OPTIONAL) Rolling jack  
(选配) 二次小车

- Pneumatic Lock Release**  
气动解锁
- Electromagnetic Lowering**  
电磁下降
- For Wheel Alignment**  
四轮定位

### Rolling jack (OPTIONAL)

二次小车 (可选配置) 2T/3T

Convenient for clients' self-installation  
方便客户自行安装



Manual Control  
手动小车



Pneumatic Control  
气动小车



Electric Control  
电动小车

C35 C45 --U-X20TD/X20TS/X20TQ, C55 --U-X30TD/X30TS/X30TQ  
C35 C45 推荐U-X20TD/X20TS/X20TQ, C55 推荐U-X30TD/X30TS/X30TQ

### OPTIONAL

可选配置




Position-adjustable turntable  
转角盘, 位置可调



Photoelectric switch  
光电水平

### DIMENSION 尺寸参数

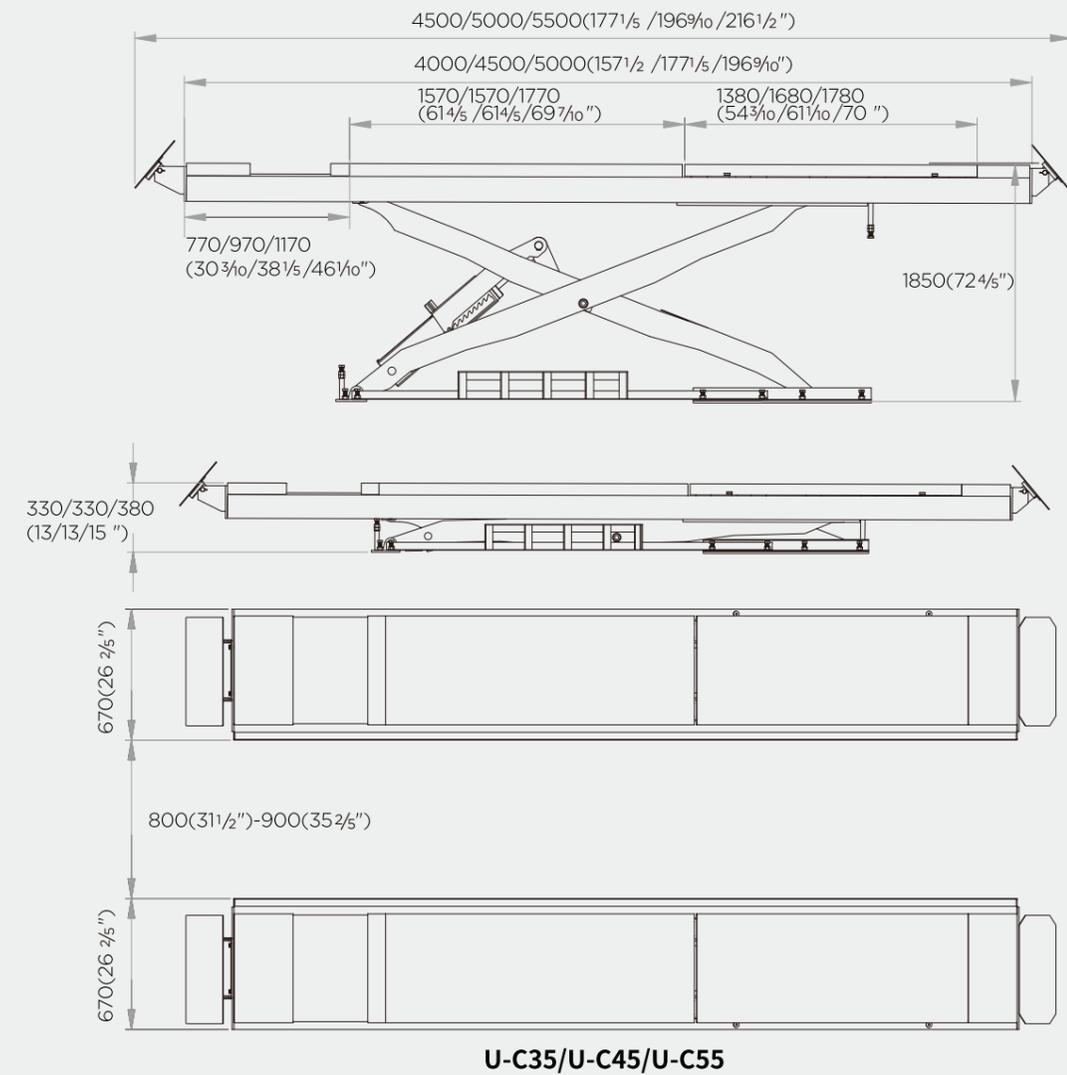


### SAFETY FEATURES 安全特点



Precision machined double sided safety teeth design  
独特双边安全锁齿设计




Safety descending stop & alarm  
二次下降, 近地骤停  
警报提示



Safety valve for anti-explosion of hydraulic system  
安全阀加强安全保护



Height limit switch  
高度限位开关



Abrasion resistant slip plates for 4 wheel alignment  
四轮定位耐磨侧滑配置

### TECHNICAL DATA 技术参数

MODEL 型号	U-C35 / C45	U-C55
Capacity 举升重量	<b>3.5 Ton / 4.5 Ton</b>	<b>5.5 Ton</b>
Lifting height 举升高度	1850mm(73 ")	1850mm(73 ")
Min height 平台高度	330mm(13")	380mm(15")
Platform length 平台长度	4000mm(127 1/2 ") / 4500mm(177 1/5 ")	5000mm(196 9/10 ")
Power supply 电源功率	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW

# U-Y35 U-Y35D/Y40



(CE: ONLY FOR U-Y35/Y40)

## Tubular Structure Wheel Alignment Scissor Lift With Built In Lifting Platforms

方通大剪子母双层四轮定位举升机



- Pneumatic Lock Release**  
气动解锁
- Electromagnetic Lowering**  
电磁下降
- For Wheel Alignment**  
四轮定位
- Lengthened Platform**  
主机平台加长

### STANDARD 标准配置



Abrasion resistant slip plates for 4 wheel alignment  
四轮定位耐磨侧滑配置



High-precision synchronized hydraulic cylinders with imported sealed rings  
高精度同步液压油缸 优选进口密封圈



EVA rubber mat (4pcs/set)  
EVA胶垫 (4pcs/套)

### OPTIONAL 可选配置



Position-adjustable turntable  
转角盘, 位置可调



Photoelectric switch  
光电水平


### SAFETY FEATURES 安全特点



Precision machined double sided safety teeth design  
独特双边安全锁齿设计



Safety descending stop & alarm  
二次下降, 近地骤停 警报提示



Safety valve for anti-explosion of hydraulic system  
安全阀加强安全保护




Height limit switch (Jack)  
子机上限位



Height limit switch (Main platform)  
主平台高度限位开关

### DIMENSION 尺寸参数

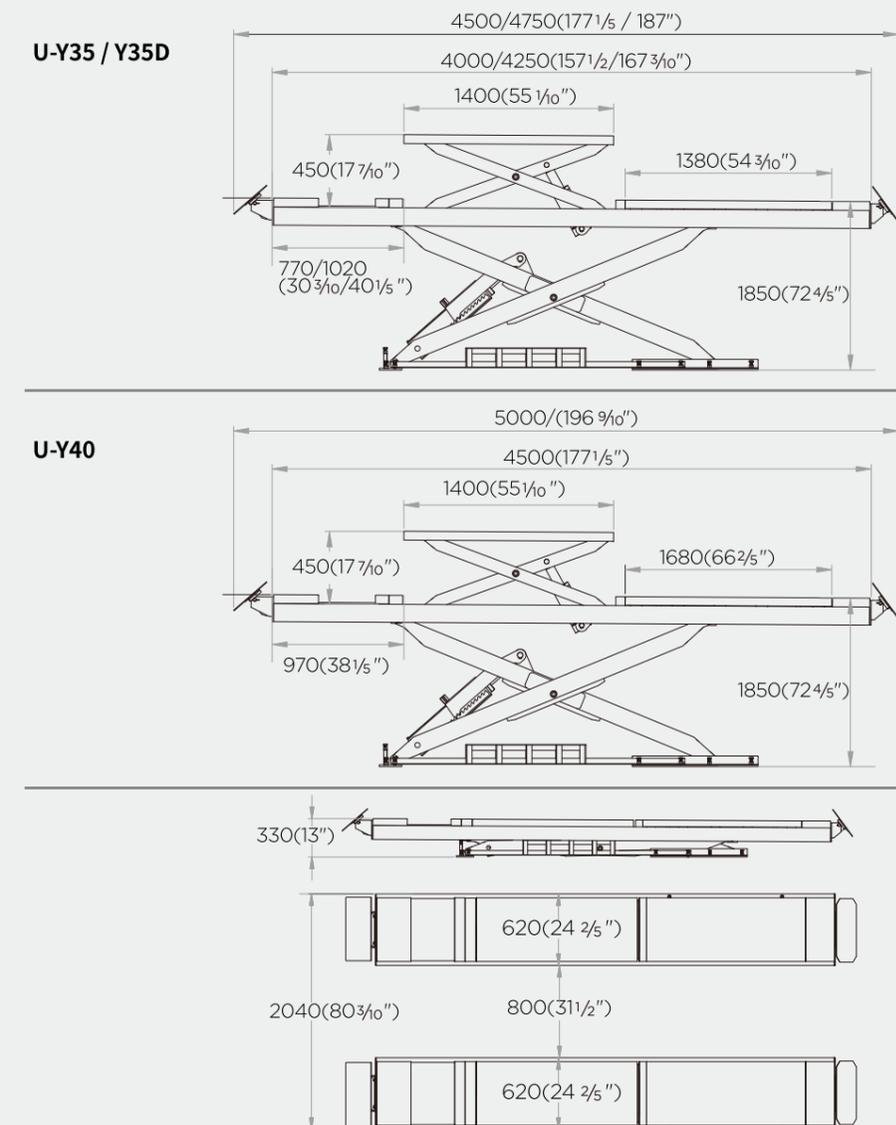

### TECHNICAL DATA 技术参数

MODEL 型号	PL-Y35 / Y35D	PL-Y40
Capacity 举升重量	<b>3.5 Ton</b>	<b>4.0 Ton</b>
Lifting height 举升高度	1850mm(73 ")	1850mm(73 ")
Min height 平台高度	330mm(13")	330mm(13")
Platform length 平台长度	4000mm(127 1/2 ") / 4500mm(177 1/5 ")	4500mm(177 1/5 ")
Power supply 电源功率	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW

# U-D35/D35C U-D35D/D35H




(CE: ONLY FOR U-D35/D35H)


## Solid Steel Structure Wheel Alignment Scissor Lift Built In Lifting Platforms

大剪子母双层四轮定位举升机

U-D35

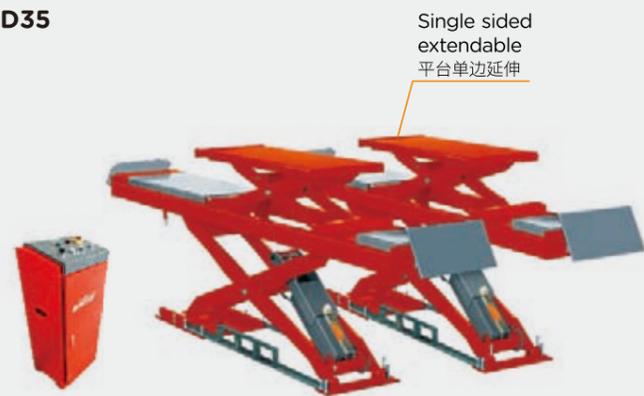


Single sided extendable  
平台单边延伸




Double sided extendable  
子机平台可双边延伸



Position adjustable  
SUV adaptors  
专利可调节SUV装置



Lengthened  
Platform  
主机平台加长



Heightened  
举升高度加高



Pneumatic Lock Release  
气动解锁



Electromagnetic Lowering  
电磁下降



For Wheel Alignment  
四轮定位

U-D35C



U-D35 + C

U-D35D



U-D35 + D

U-D35H



U-D35 + H

## SAFETY FEATURES 安全特点



Safety valve for anti-explosion of hydraulic system  
安全阀加强安全保护




Safety descending stop & alarm  
二次下降, 近地骤停  
警报提示




Precision machined double sided safety teeth design  
独特双边安全锁齿设计



Height limit switch (Jack)  
子机上限位




Height limit switch (Main platform)  
主平台高度限位开关




Abrasion resistant slip plates for 4 wheel alignment  
四轮定位耐磨侧滑配置

## DIMENSION 尺寸参数

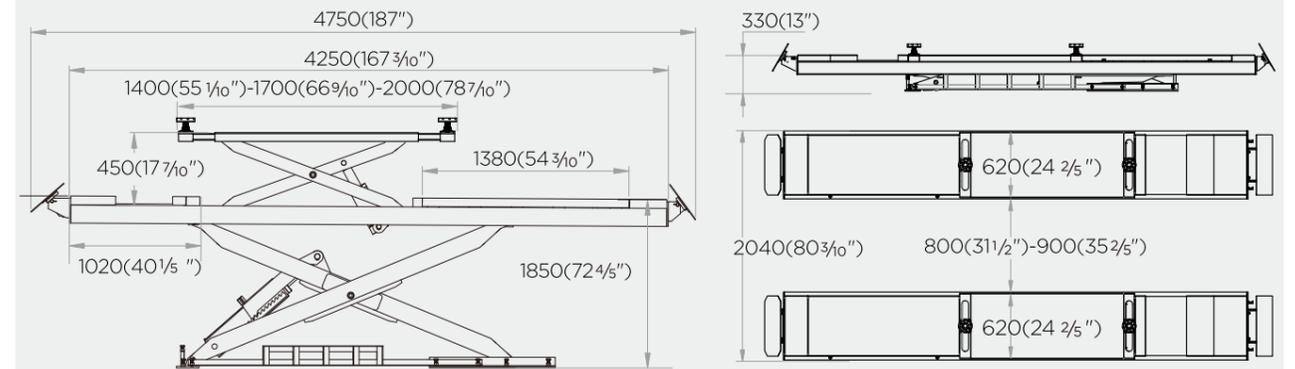

U-D35C

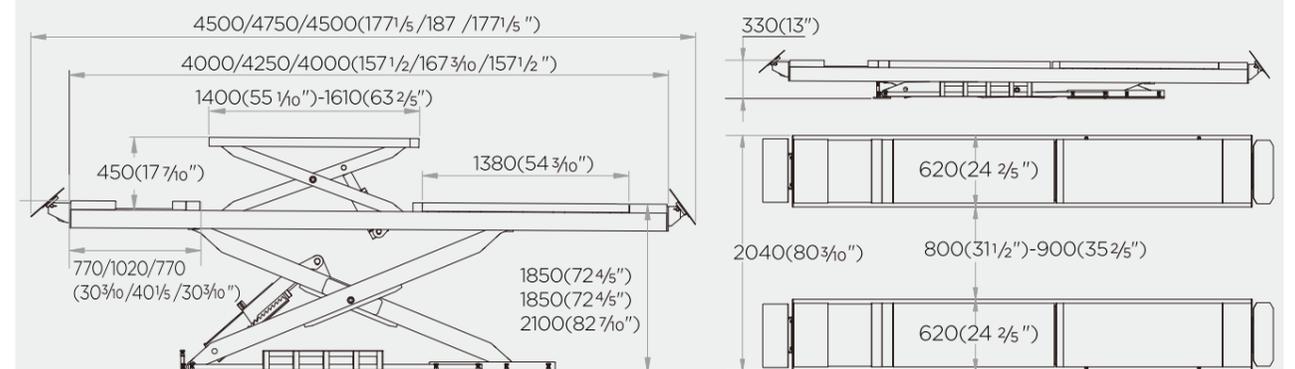

U-D35/U-D35D/U-D35H

## TECHNICAL DATA 技术参数

MODEL 型号	U-D35C	U-D35 / D35D/D35H
Capacity 举升重量	3.5 Ton	3.5 Ton
Lifting height 举升高度	1850mm(73")	1850/1850/2100mm(72 4/5 / 72 4/5 / 82 7/10")
Min height 平台高度	330mm(13")	330mm(13")
Platform length 平台长度	4250mm(167 3/10")	4000/4250/4000mm(157 1/2 / 167 3/10 / 157 1/2")
Power supply 电源功率	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW

# U-D45 U-D45C/D45H




(CE: ONLY FOR U-D45/D45H)


## Solid Steel Structure Wheel Alignment Scissor Lift Built In Lifting Platforms

大剪子母双层四轮定位举升机

### U-D45

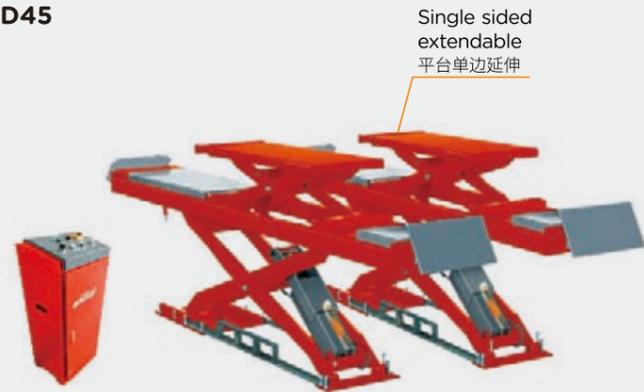


Single sided extendable  
平台单边延伸



Double sided extendable  
平台可双边延伸



Position adjustable  
SUV adaptors  
专利可调节SUV装置



Heightened  
举升高度加高



Pneumatic Lock Release  
气动解锁



Electromagnetic Lowering  
电磁下降



For Wheel Alignment  
四轮定位

### U-D45C



U-D45 + C

### U-D45H



U-D45 + H

### OPTIONAL 可选配置



Position-adjustable turntable  
转角盘,位置可调



Photoelectric switch  
光电水平

### SAFETY FEATURES 安全特点



Safety valve for anti-explosion of hydraulic system  
安全阀加强安全保护



Safety descending stop & alarm  
二次下降, 近地骤停  
警报提示




Precision machined double sided safety teeth design  
独特双边安全锁齿设计



Height limit switch (Jack)  
子机上限位





Height limit switch (Main platform)  
主平台高度限位开关





Abrasion resistant slip plates for 4 wheel alignment  
四轮定位耐磨侧滑配置

### DIMENSION 尺寸参数

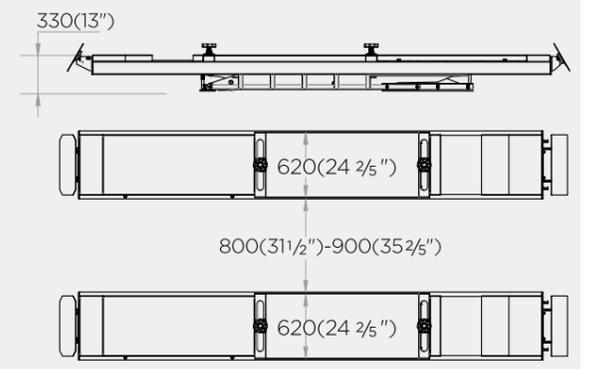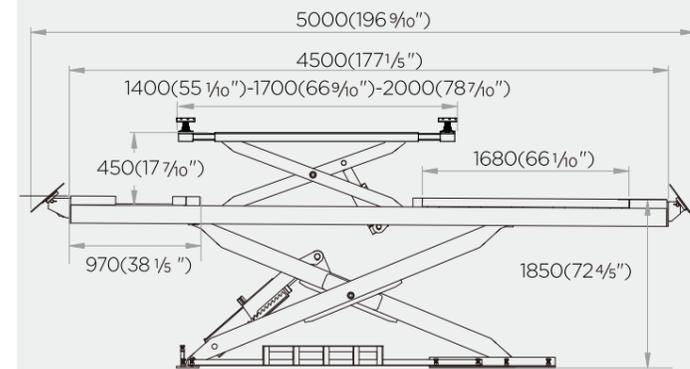

U-D45C

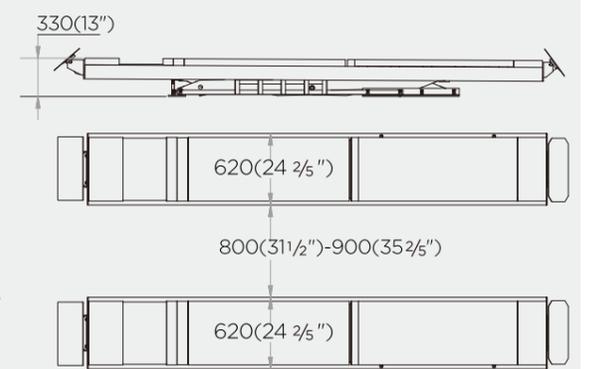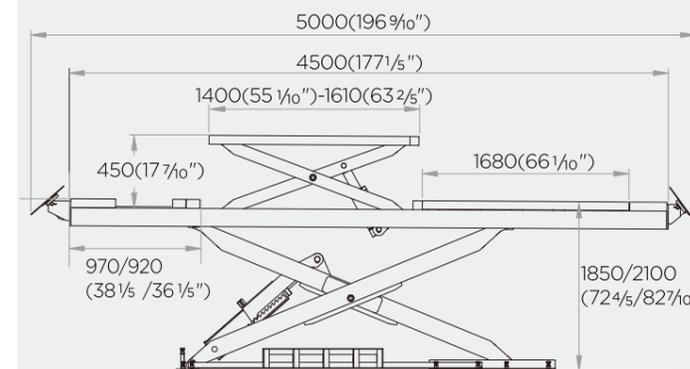

U-D45/U-D45H

### TECHNICAL DATA 技术参数

MODEL 型号	U-D45C	U-D45 /D45H
Capacity 举升重量	4.5 Ton	4.5 Ton
Lifting height 举升高度	1850mm(73 ")	1850/2100mm(72 4/8 / 82 7/16 ")
Min height 平台高度	330mm(13")	330mm(13")
Platform length 平台长度	4500mm(177 1/8 ")	4500mm(177 1/8 ")
Power supply 电源功率	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW

# U-D55/D55H




(CE: ONLY FOR U-D55/D55H)


## Solid Steel Structure Wheel Alignment Scissor Lift Built In Lifting Platforms

大剪子母双层四轮定位举升机

### U-D55

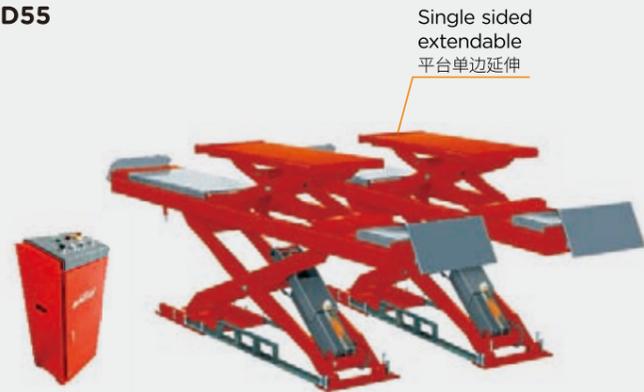

Single sided extendable platform 单边延伸平台



Heightened 举升高度加高

### U-D55H



U-D55 + H



Pneumatic Lock Release 气动解锁



Electromagnetic Lowering 电磁下降



For Wheel Alignment 四轮定位

### STANDARD 标准配置



Abrasion resistant slip plates for 4 wheel alignment 四轮定位耐磨侧滑配置



EVA rubber mat (4pcs/set) EVA胶垫 (4pcs/套)

### OPTIONAL 可选配置



Position-adjustable turntable 转角盘, 位置可调



Photoelectric switch 光电水平

### SAFETY FEATURES 安全特点



Safety valve for anti-explosion of hydraulic system 安全阀加强安全保护



Safety descending stop & alarm 二次下降, 近地骤停 警报提示



Precision machined double sided safety teeth design 独特双边安全锁齿设计




Height limit switch (Jack) 子机上限位




Height limit switch (Main platform) 主平台高度限位开关

### DIMENSION 尺寸参数

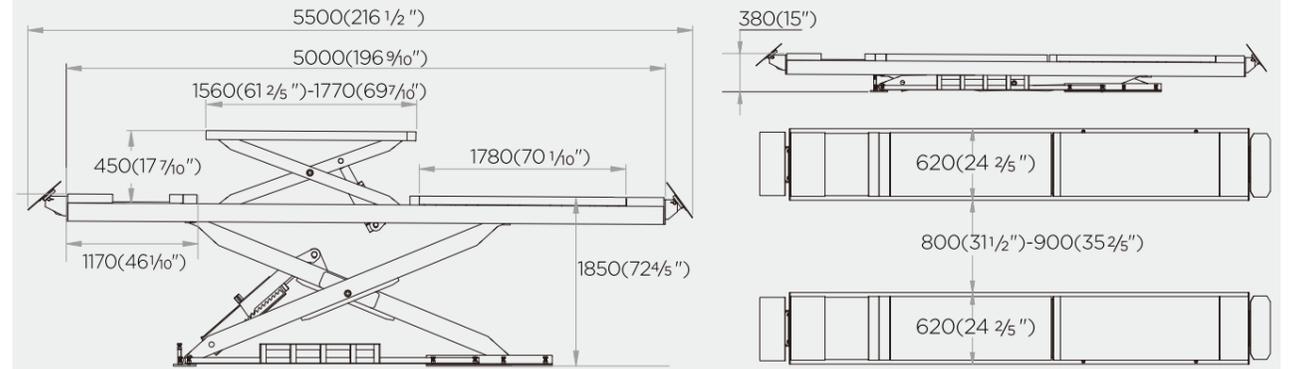

U-D55

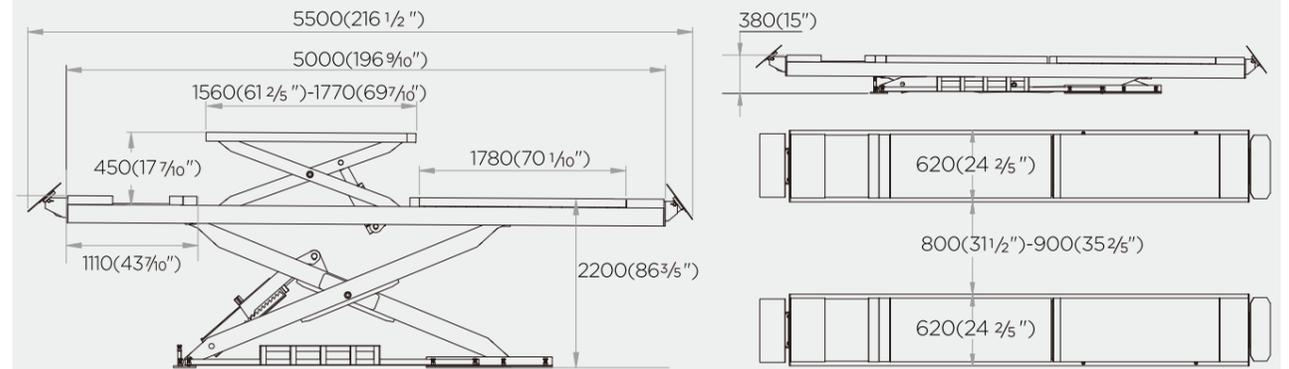

U-D55H

### TECHNICAL DATA 技术参数

MODEL 型号	U-D55	U-D55H
Capacity 举升重量	5.5 Ton	5.5 Ton
Lifting height 举升高度	1850mm(73 ")	2200mm(86 3/5 ")
Min height 平台高度	380mm(15")	380mm(15")
Platform length 平台长度	5000mm(196 9/10")	5000mm(196 9/10")
Power supply 电源功率	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW

# U-D35B/D40B



## Low Profile On Ground Wheel Alignment Scissor Lift 超薄大剪平板四轮定位举升机



Built-in guide rails for auxiliary jack  
预留二次小车内导轨

- No ditch needed**  
免挖坑
- Pneumatic Lock Release**  
气动解锁
- Electromagnetic Lowering**  
电磁下降
- For Wheel Alignment**  
四轮定位

### Rolling jack (OPTIONAL) 二次小车 (可选配置) 2T

Convenient for clients' self-installation  
方便客户自行安装



Manual Control  
手动小车



Pneumatic Control  
气动小车



Electric Control  
电动小车

D35B D40B --U-X20TD/X20TS/X20TQ  
D35B D40B 推荐U-X20TD/X20TS/X20TQ

### OPTIONAL 可选配置



Position-adjustable turntable  
转角盘,位置可调



Photoelectric switch  
光电水平

### SAFETY FEATURES 安全特点




Safety valve for anti-explosion of hydraulic system  
安全阀加强安全保护




Safety descending stop & alarm  
二次下降, 近地骤停  
警报提示




Extra double auxiliary oil cylinders  
双助力辅助油缸



Precision machined double sided safety teeth design  
独特双边安全锁齿设计




Height limit switch  
高度限位开关



Abrasion resistant slip plates for 4 wheel alignment  
四轮定位耐磨侧滑配置

### DIMENSION 尺寸参数

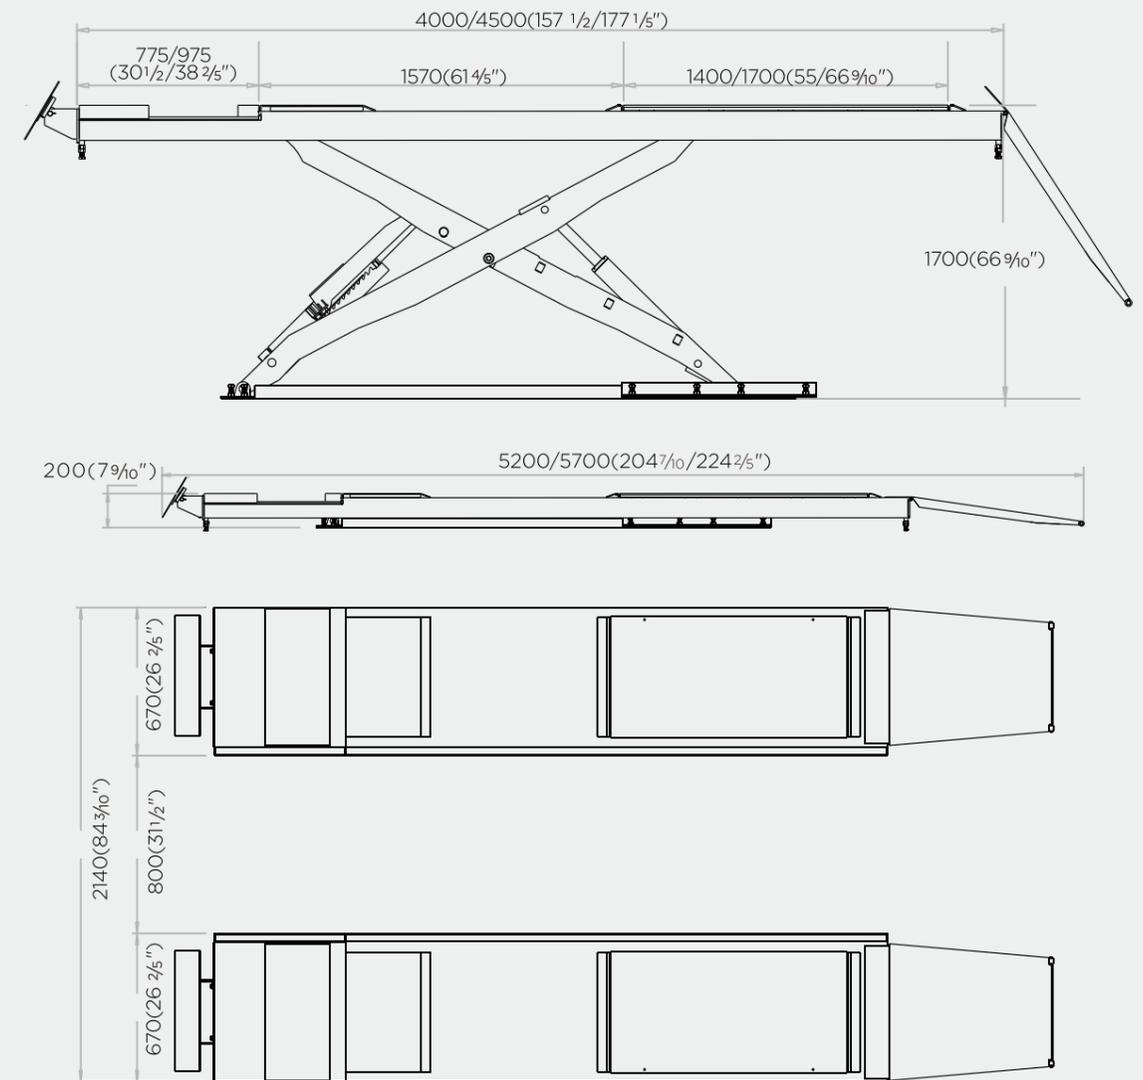

### TECHNICAL DATA 技术参数

MODEL 型号	U-D35B	U-D40B
Capacity 举升重量	3.5 Ton	4 Ton
Lifting height 举升高度	1700mm (66 9/10")	1700mm (66 9/10")
Min height 平台高度	200mm (7 9/10")	200mm (7 9/10")
Platform length 平台长度	4000mm (127 1/2")	4500mm (177 1/8")
Power supply 电源功率	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW

# U-H25 U-H45

Pantograph Lift  
平行小剪



## FEATURES 安全特点




Parallel structure design  
平行结构设计  
使机身稳定耐用



Safety valve for anti-explosion of hydraulic system  
安全阀加强安全保护

## DIMENSION 尺寸参数

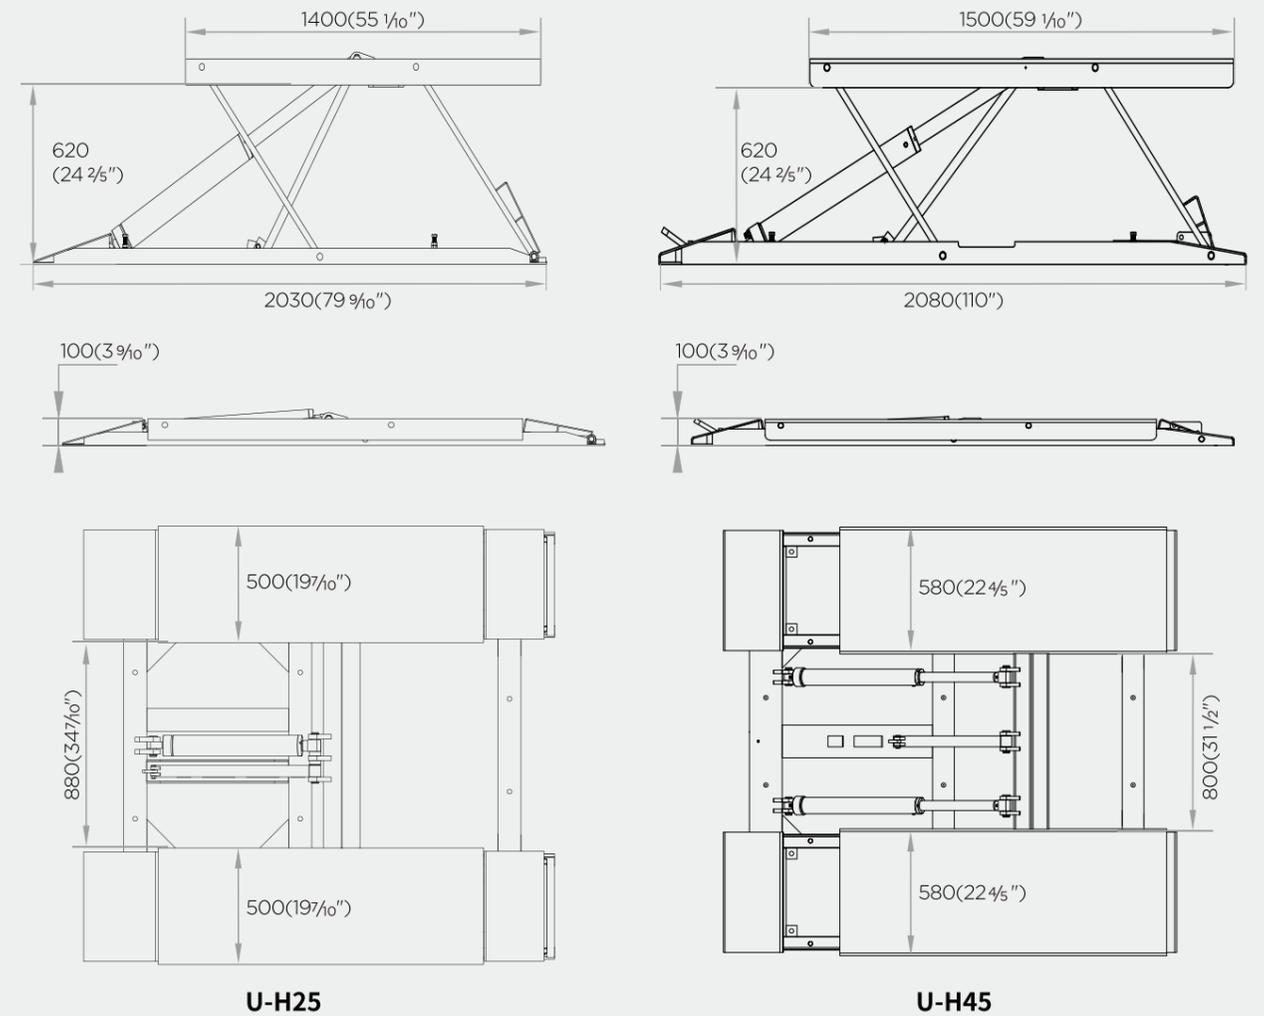

## TECHNICAL DATA 技术参数

MODEL 型号	U-H25	U-H45
Capacity 举升重量	<b>2.5 Ton</b>	<b>4.5 Ton</b>
Lifting height 举升高度	620mm(24 2/5")	620mm(24 2/5")
Min height 平台高度	100mm(4")	100mm(4")
Platform length 平台长度	1400mm(55 1/16")	1500mm(59 1/16")
Power supply 电源功率	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW

# U-H30M U-H45M

Small Platform Pantograph Lift  
移动平行小剪



No ditch needed  
免挖坑

Automatic Release  
自动解锁

Manual lowering  
手动下降

ULTRA-THIN  
100mm 超薄



## FEATURES 安全特点




Parallel structure design  
平行结构设计  
使机身稳定耐用



Safety valve for anti-explosion of hydraulic system  
安全阀加强安全保护

## DIMENSION 尺寸参数

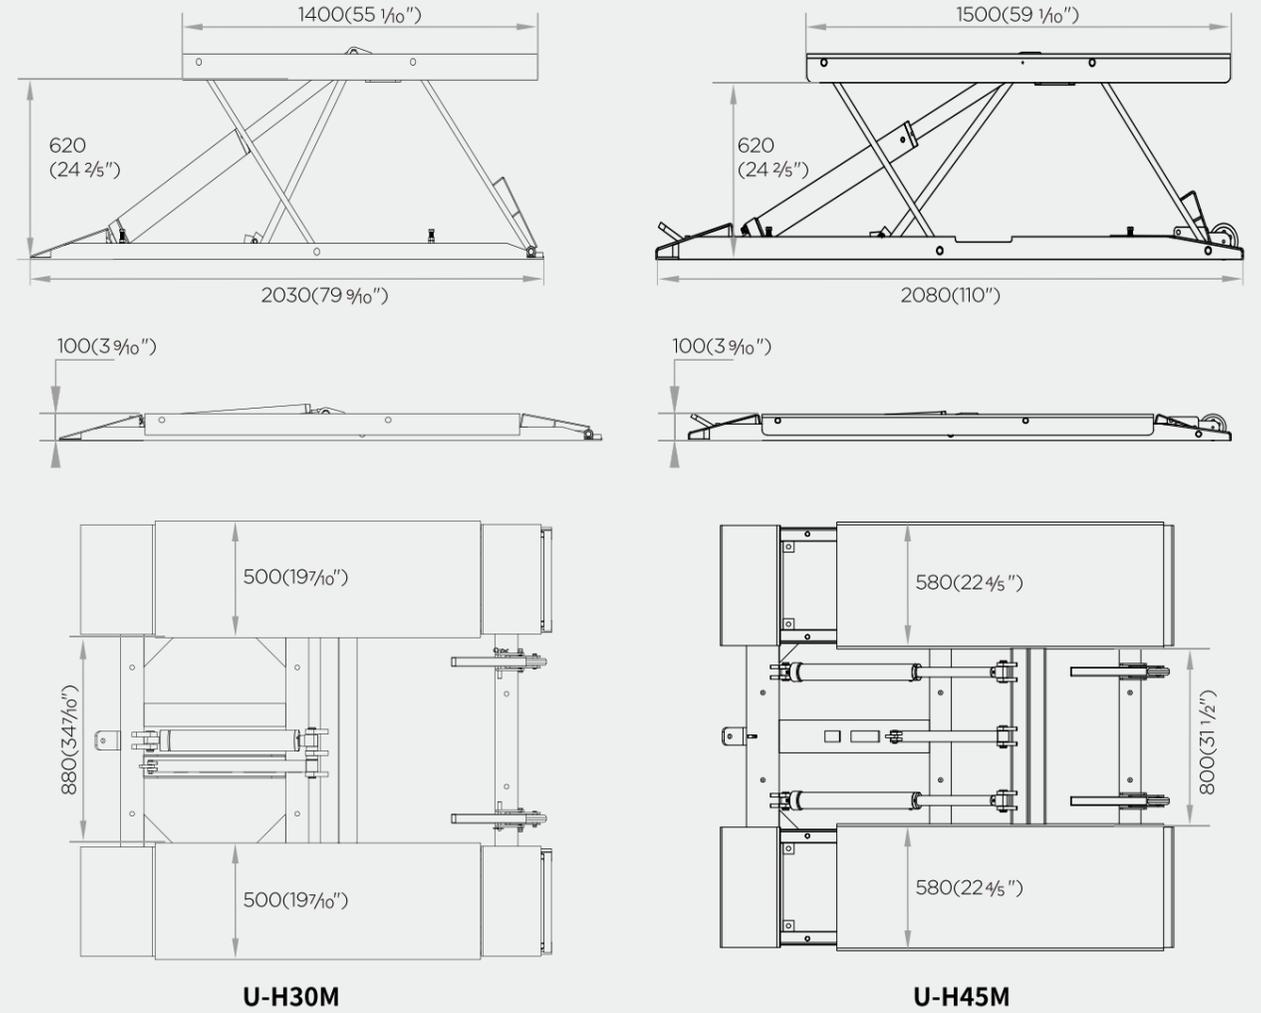

## TECHNICAL DATA 技术参数

MODEL 型号	U-H30M	U-H45M
Capacity 举升重量	3.0 Ton	4.5 Ton
Lifting height 举升高度	620mm(24 3/5")	620mm(24 3/5")
Min height 平台高度	100mm(4")	100mm(4")
Platform length 平台长度	1400mm(55 1/16")	1500mm(59 1/16")
Power supply 电源功率	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW

# U-Z25M/Z30M U-Z30LM

Mobile Mid-rise Scissor Lift  
移动连体中位小剪剪式举升机



No ditch needed  
免挖坑

Electrical Lock Release  
电动解锁

Electromagnetic Lowering  
电磁下降



\* In service state




\* Moving state

## FEATURES 安全特点




Electrical locks engaged automatically when lowering  
下降时自动开启电磁安全锁



Synchronized hydraulic cylinders system  
同步2缸系统




Safety descending stop & alarm  
二次下降，近地骤停警报提示



Safety valve for anti-explosion of hydraulic system  
安全阀加强安全保护




Height limit switch  
高度限位开关




X 4pcs  
160\*120\*35mm

Rubber pads  
橡胶垫

## DIMENSION 尺寸参数

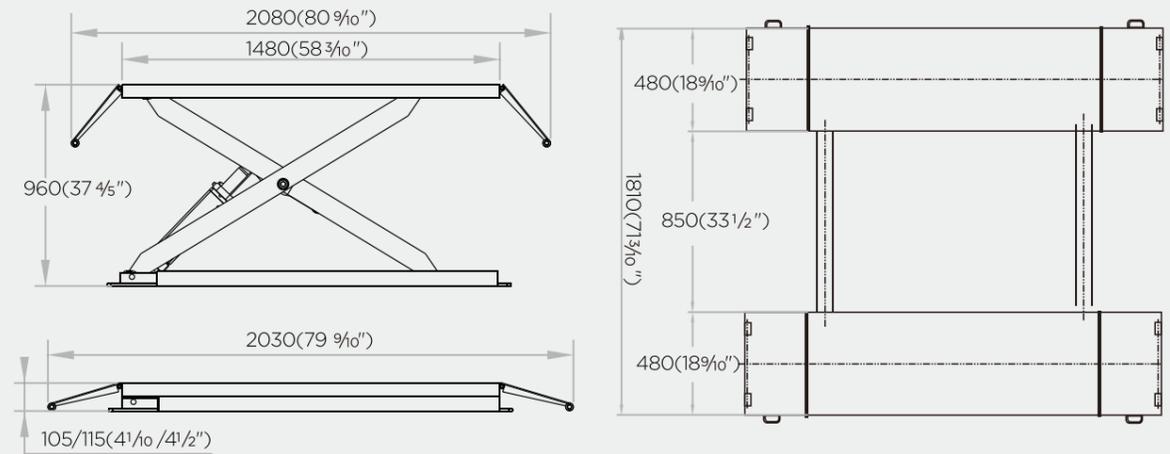

U-Z25M/U-Z30M

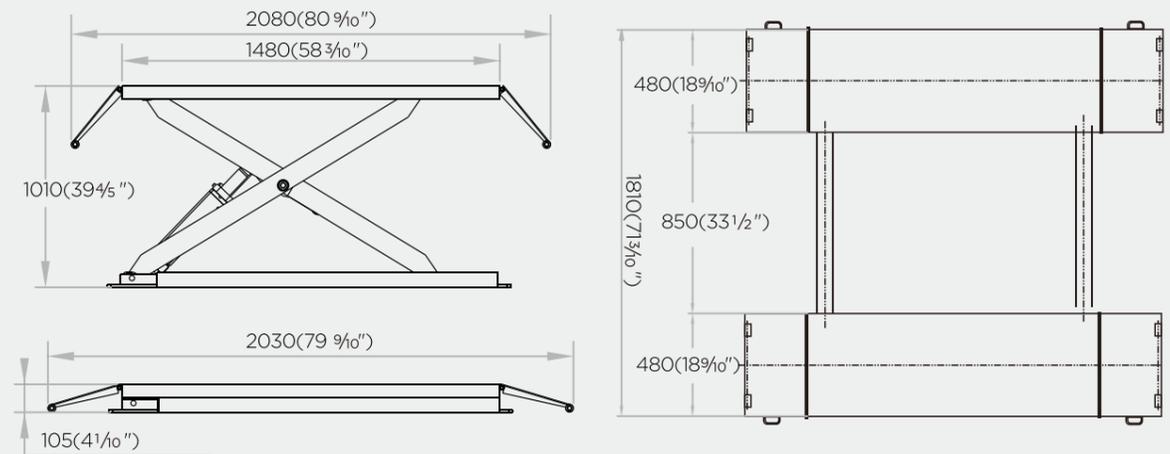

U-Z30LM

## TECHNICAL DATA 技术参数


MODEL 型号	U-Z25M/Z30M	U-Z30LM
Capacity 举升重量	2.5 Ton/3.0 Ton	3.0 Ton
Lifting height 举升高度	960mm(37 4/5")	1010mm(39 4/5")
Min height 平台高度	105/115mm(4 1/10 / 4 1/2")	105mm(4 1/10")
Platform length 平台长度	2080mm(81 4/5")	2080mm(81 4/5")
Power supply 电源功率	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW

# U-Z30 U-Z30Y

Mid-rise Scissor Lift  
中位小剪剪式举升机



## U-Z30

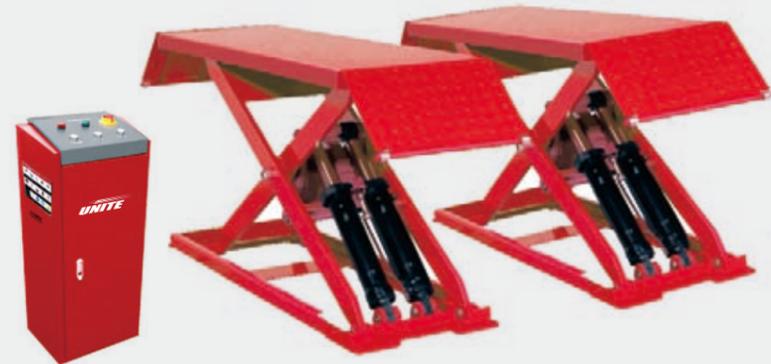

- No ditch needed**  
免挖坑
- Pneumatic Lock Release**  
气动解锁
- Electromagnetic Lowering**  
电磁下降

## U-Z30+A = U-Z30Y



Allows to fix the ramp as an extendable platform, suits for long wheel base vehicles  
上车板可固定用作平台延伸板, 适合长底盘车型



**X 4pcs**  
160\*120\*35mm  
Rubber pads  
橡胶垫

## OPTIONAL 可选配置



Drive-by-wire button  
线控按钮



Photoelectric leveling  
光电水平

## FEATURES 安全特点



Precision machined safety lock  
安全锁设计保证操作安全



Synchronized hydraulic cylinders system  
同步4缸系统



Safety descending stop & alarm  
二次下降, 近地骤停  
警报提示




Safety valve for anti-explosion of hydraulic system  
安全阀加强安全保护



Height limit switch  
高度限位开关

## DIMENSION 尺寸参数

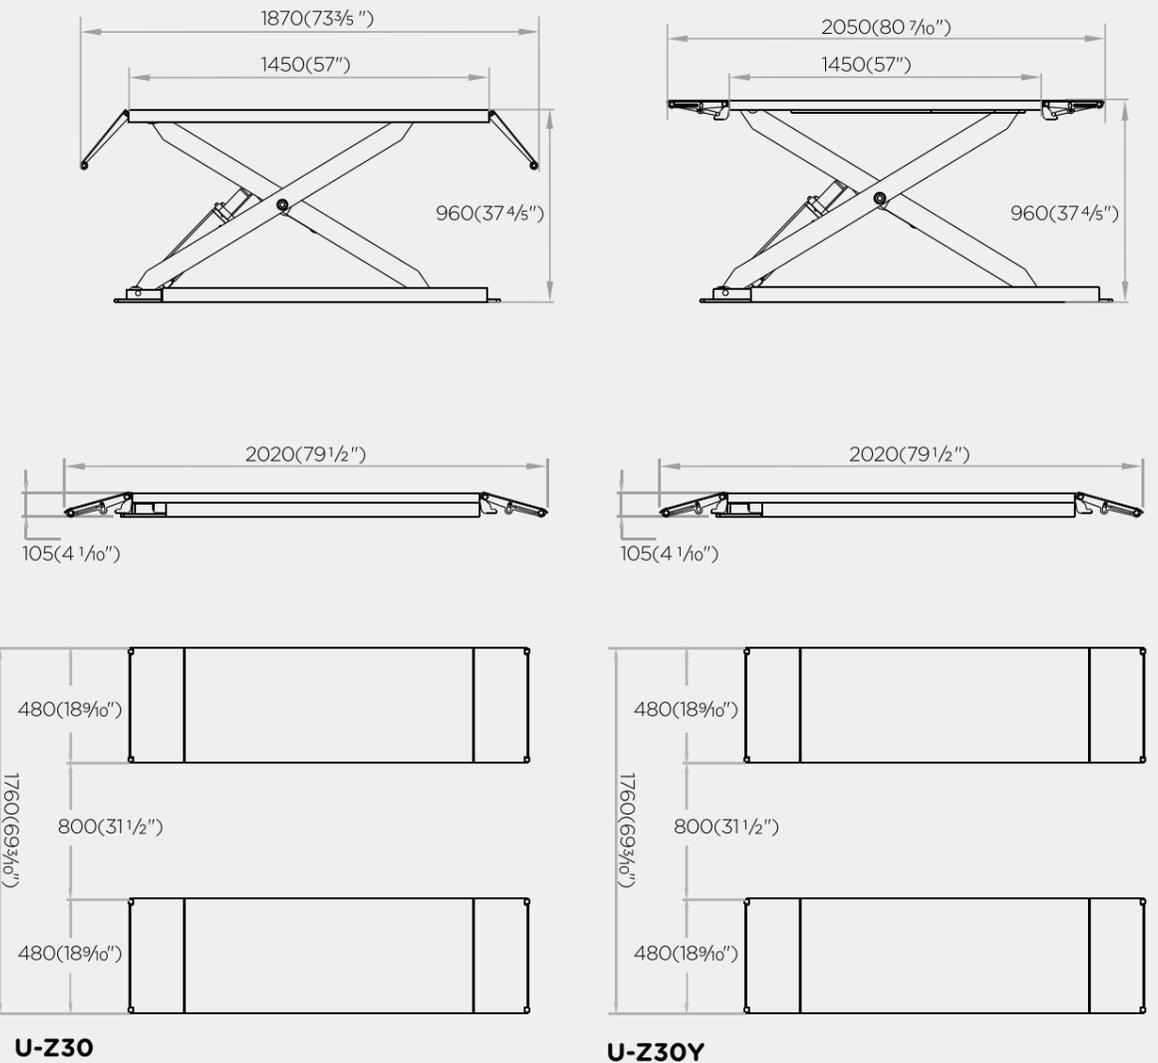

## TECHNICAL DATA 技术参数

MODEL 型号	U-Z30/Z30Y
Capacity 举升重量	3.0 Ton
Lifting height 举升高度	960mm(37 4/5")
Min height 平台高度	105mm(4 1/16")
Platform length 平台长度	2020mm(79 1/2")
Power supply 电源功率	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW

# U-B30 U-B30Y

Ultra-Thin Wheel Free Scissor Lift  
超薄小型剪式举升机




**No ditch needed**  
免挖坑

**Pneumatic Lock Release**  
气动解锁

**Electromagnetic Lowering**  
电磁下降

**U-B30+A = U-B30Y**



Allows to fix the ramp as an extendable platform, suits for long wheel base vehicles  
上车板可固定用作平台延伸板，适合长底盘车型

**OPTIONAL**  
可选配置



Drive-by-wire button  
线控按钮




Photoelectric leveling  
光电水平

## FEATURES 安全特点



Precision machined safety lock  
安全锁设计保证操作安全



Synchronized hydraulic cylinders system  
同步4缸系统




Safety descending stop & alarm  
二次下降，近地骤停警报提示



Safety valve for anti-explosion of hydraulic system  
安全阀加强安全保护




Height limit switch  
高度限位开关



Rubber pads  
橡胶垫

## DIMENSION 尺寸参数

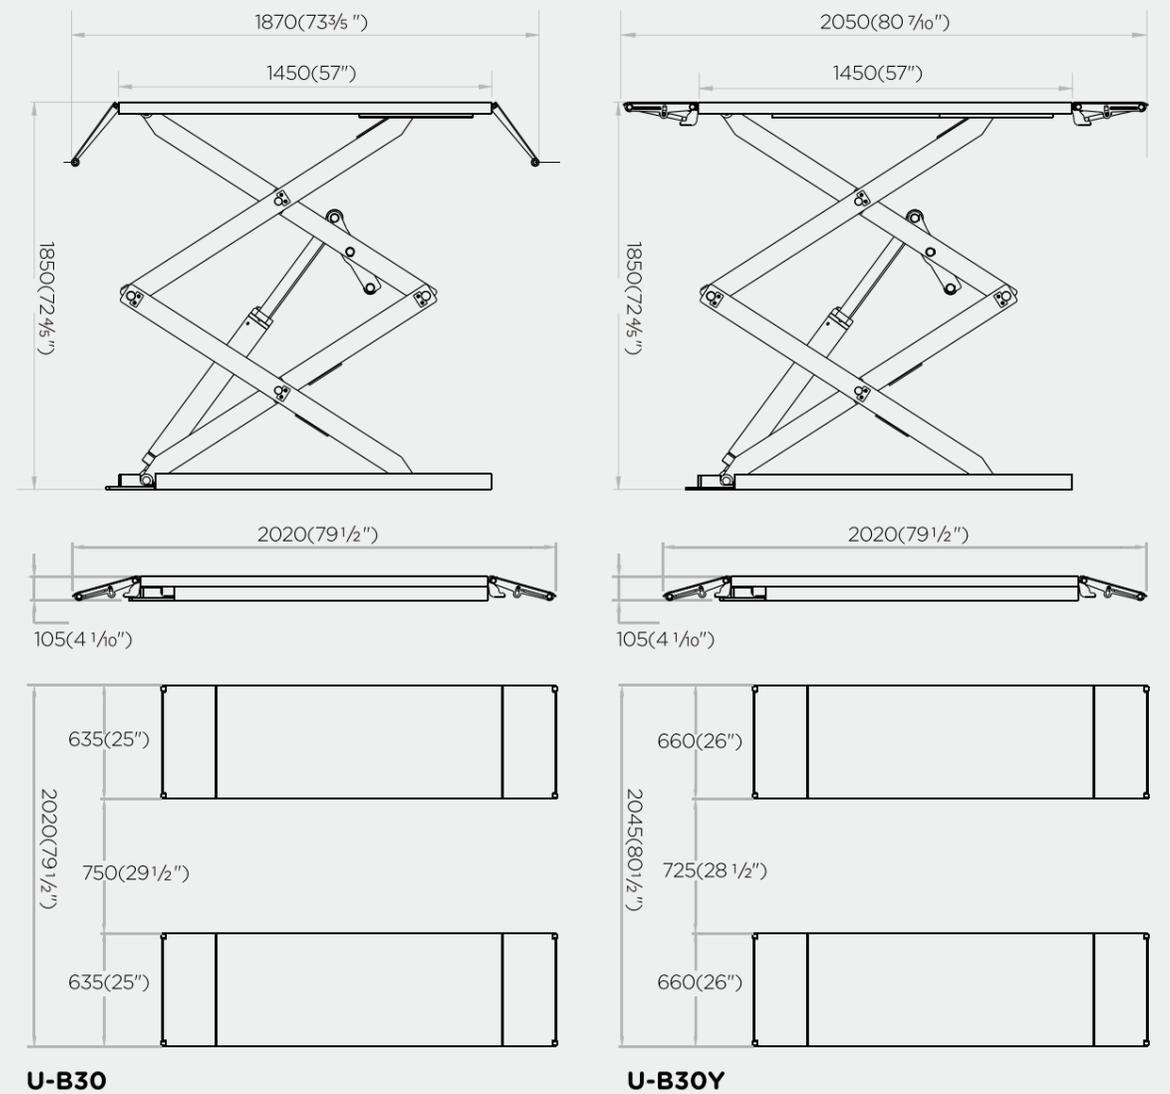

## TECHNICAL DATA 技术参数

MODEL 型号	U-B30/B30Y
Capacity 举升重量	3.0 Ton
Lifting height 举升高度	1850mm(72 9/10")
Min height 平台高度	105mm(4 1/10")
Platform length 平台长度	2020mm(79 1/2")
Power supply 电源功率	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW



# U-E35 U-E35L/E35C




Full Rise Scissor Lift  
藏地小剪式汽车举升机


**U-E35**




Single sided extendable  
平台单边延伸



Double sided extendable  
平台可双边延伸



Double sided extendable with adaptors  
平台可双边延伸



Position adjustable SUV adaptors  
专利可调节SUV装置



**Pneumatic Lock Release**  
气动解锁



**Electromagnetic Lowering**  
电磁下降

**U-E35L**



U-E35 + L

**U-E35C**



U-E35 + C

### OPTIONAL 可选配置



Drive-by-wire button  
线控按钮



Photoelectric switch  
光电水平

### SAFETY FEATURES 安全特点



Precision machined safety lock  
精加工安全锁设计  
保证操作安全




Safety descending stop & alarm  
二次下降, 近地骤停  
警报提示



Safety valve for anti-explosion of hydraulic system  
安全阀加强安全保护




Height limit switch  
上限位开关



EVA rubber mat (4pcs/set)  
EVA胶垫 (4pcs/套)

### DIMENSION 尺寸参数

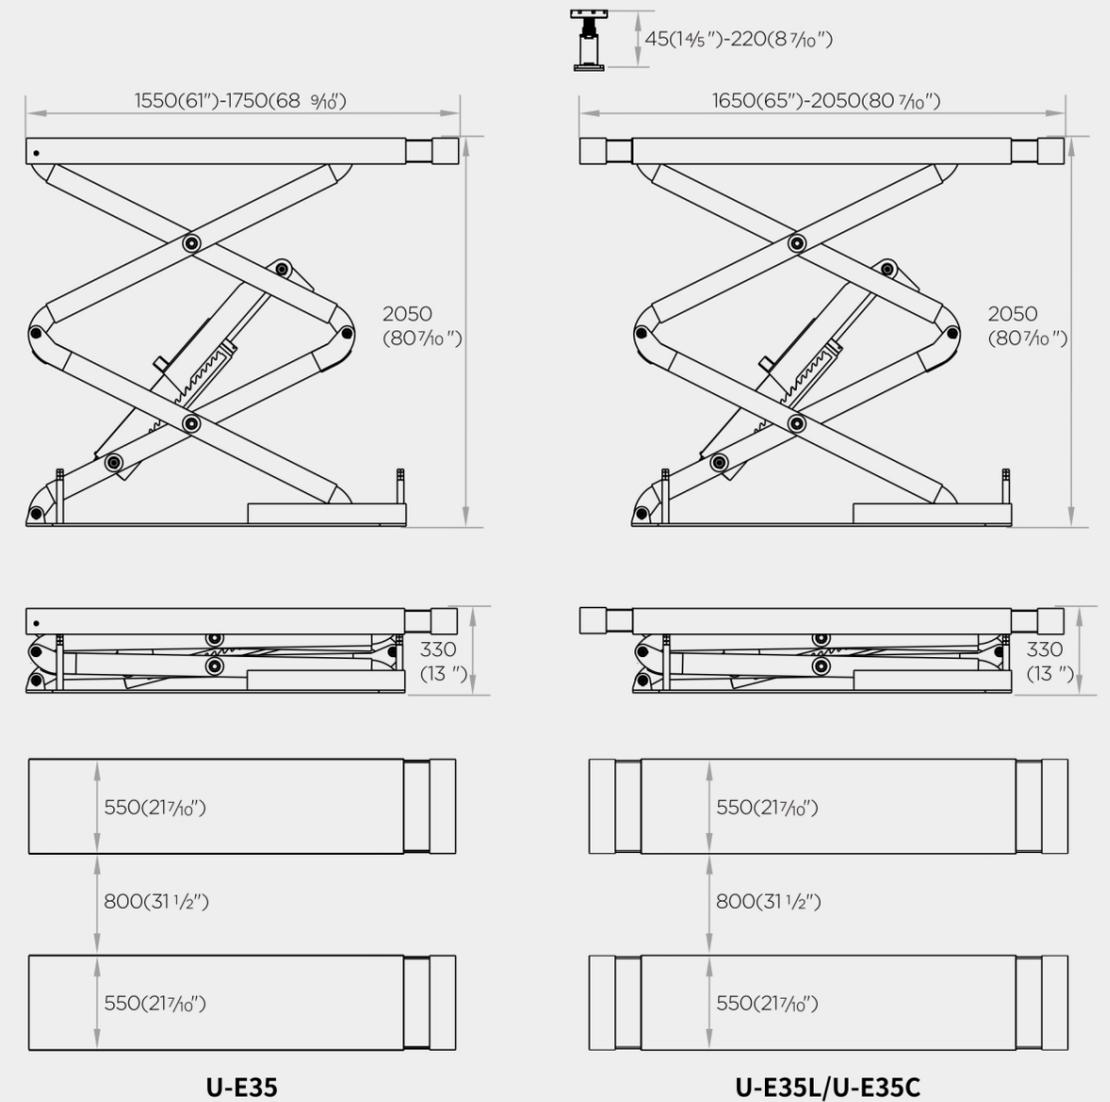

### TECHNICAL DATA 技术参数

MODEL 型号	U-E35	U-E35L/E35C
Capacity 举升重量	3.5 Ton	3.5 Ton
Lifting height 举升高度	2050mm(80")	2050mm(80")
Min height 平台高度	330mm(13")	330mm(13")
Platform length 平台长度	1550mm(61")--1750mm(68 9/16")	1650mm(65")--2050mm(80 7/16")
Power supply 电源功率	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW

# U-DP5

## Ev Battery Lift

新能源动力车电池举升机



### FEATURES 安全特点



Safety valve for anti-explosion of hydraulic system  
安全阀加强安全保护



Drive-by-wire button  
线控按钮

Easily transfer **Without Installation**  
移动便捷 无需安装

Elevates from **1130 -1800mm**  
举升范围: 1130-1800mm





The lift table is in either **Pneumatic** or **Electric** models  
有气动及电动两款型号可供选择

Angle adjustable table is built to meet with the battery bottom seamless  
平台可调节角度, 与电池底部无缝衔接

Convenient to position the table and carry the battery to the right place horizontally in 30mm without moving the lift  
可轻松运送电池到指定位置并将其固定, 可在30毫米的幅度内调节高度

The lift table also features high quality components assembly for **Fast & Precise** lifting  
本举升机采用高品质零件组装, 确保举升操作快捷、精确

### DIMENSION 尺寸参数

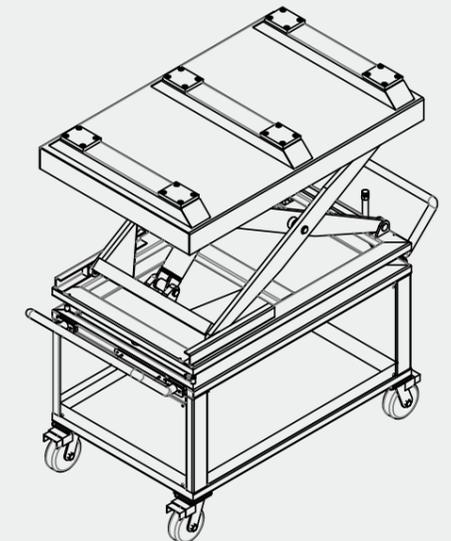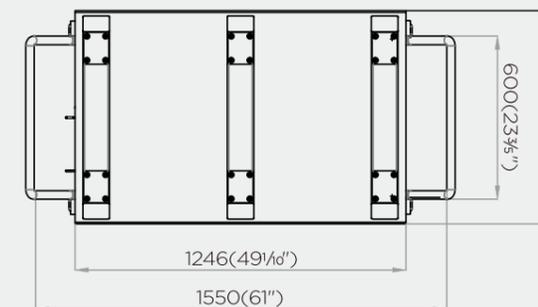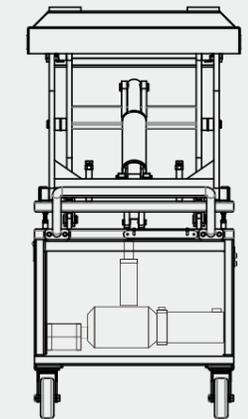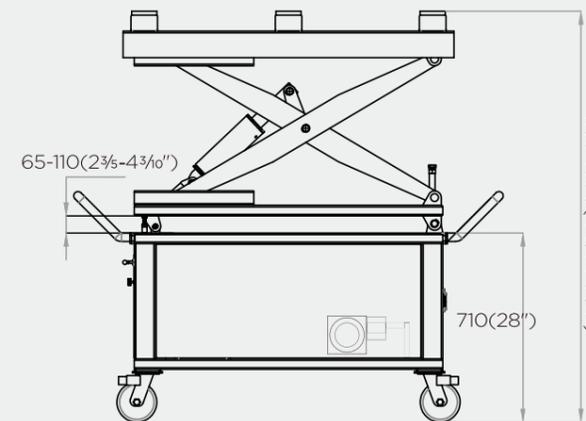

### TECHNICAL DATA 技术参数

MODEL 型号	U-DP5
Capacity 举升重量	<b>1.0 Ton</b>
Lifting height 举升高度	1800mm(70 9/16'')
Min height 平台高度	1130mm(44 1/2'')
Platform length 平台长度	1246mm (49 1/8'')
Platform Width 平台宽度	800mm (31 1/2'')
Power supply 电源功率	220V 1PH 50 1.1KW

# U-DP7

## Ev Battery Lift

新能源动力车电池举升机



### FEATURES 特点



**Precision machined safety locks**  
安全锁设计保证操作安全



**Safety valve for anti-explosion of hydraulic system**  
安全阀加强安全保护



**Height limit switch**  
高度限位开关, 保证安全作业



**Adjustable handle**  
可调节把手, 使作业时更加便捷



**Single sided extendable platform**  
平台单边延伸



**Drive-by-wire button**  
线控按钮



**No ditch needed**  
免挖坑




**Electrical Lock Release**  
电动解锁



**Electromagnetic Lowering**  
电磁下降

- Double safety guarantee: hydraulic and mechanical safety lock;  
具有液压锁和机械锁双重保险, 安全可靠;
- Providing the lowest and highest height limit to ensure safe operation;  
具有最低限位和高度限位, 保证安全作业;
- With a platform leaned all round and moving horizontally, it is a good helper for the installation and maintenance of vehicle battery or engine;  
平台可前后左右倾斜, 横向移动, 便于动力电池、发动机的安装和维修;
- It's easy to move the platform with hydraulic lifting trailer;  
平台带有液压升降拖车, 方便移动;
- Capable of lifting vehicle battery / engine within 1200kg  
可举升重量不超过1200kg的动力电池、发动机等;
- Equipped with adjusting handle to make operation more convenient  
装有调节把手, 使作业时更加便捷
- Thanks to the gimballed level, the users could monitor the real-time horizontal position of the platform;  
配有万向水平仪, 可实时检测平台的水平状况;
- The top fixed and extendable platforms are made with screw holes, for easy installation of battery/engine fixed kits; the extendable platform meets the needs of all kinds of different vehicle models;  
固定/伸缩上平台面有螺孔, 便于定位套件的安装; 且伸缩平台可往外拉伸, 适合各种不同车型;

### DIMENSION 尺寸参数

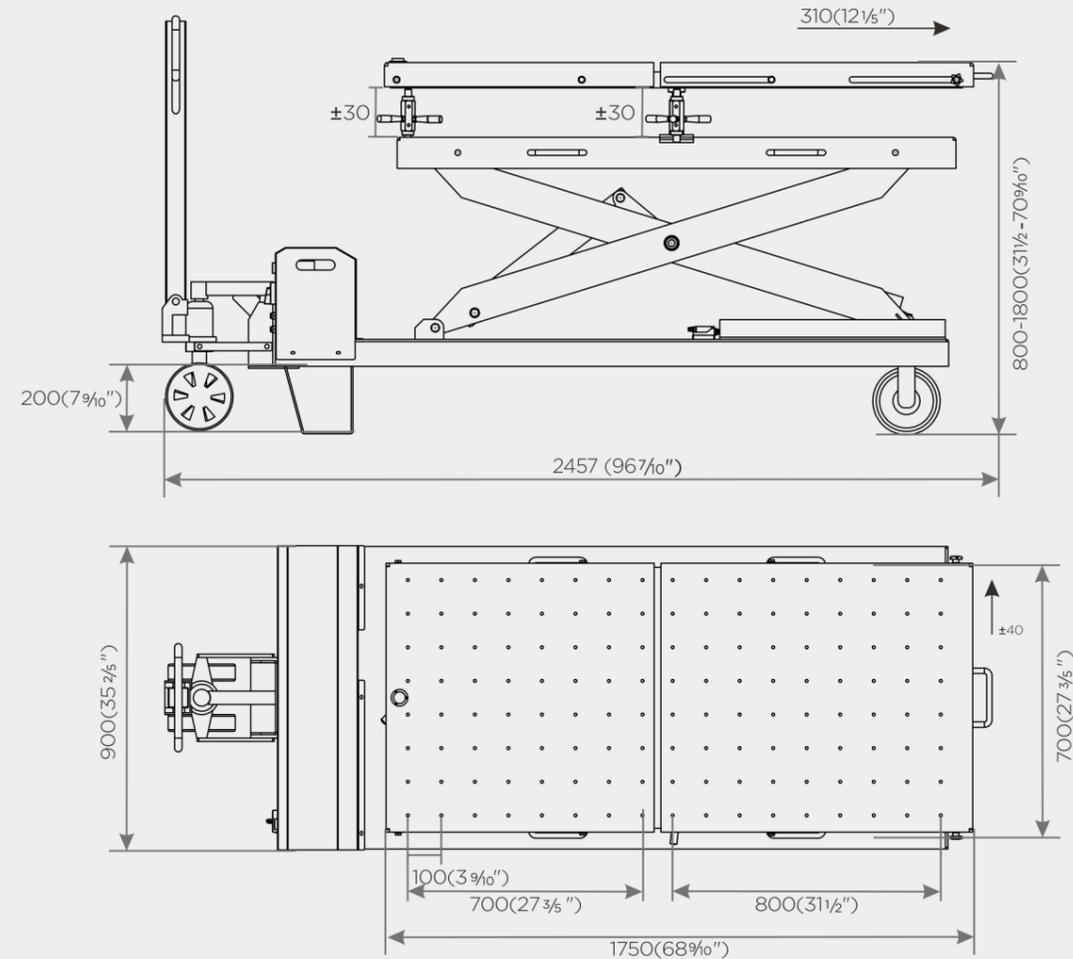

### TECHNICAL DATA 技术参数

MODEL 型号	U-DP7
Capacity 举升重量	1.2 Ton
Lifting height 举升高度	1800mm(70 9/16")
Min height 平台高度	800mm(31 1/2")
Platform length 平台长度	1750mm (68 9/16")
Platform width 平台宽度	700mm (27 3/5")
Power supply 电源功率	220V 1PH 50Hz 1.5KW

# ROLLING JACK (OPTIONAL)

二次小车 (可选配置) ▼



**U-X20TS/X30TS**

Manual Control  
手动小车



**U-X20TQ/X30TQ**


Pneumatic Control  
气动小车



**U-X20TD/X30TD**

Electric Control  
电动小车

## DIMENSION 尺寸参数

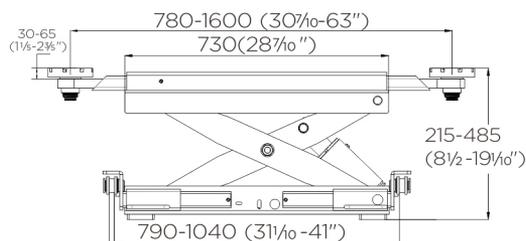

**U-X20TD/X30TD**

## FEATURES 特点



1. Telescopic arm stroke length: Max.1600mm  
伸缩臂行程长度: 最大1600mm,能满足不同轴距、不同支点车辆使用。
2. Adjustable lifting tray height: 30-65mm  
可调节升降托盘高度: 30-65mm,高、低底盘车辆通用。
3. Suitable for four post or scissor lifts  
可以与四柱举升机、平板剪式举升机配套使用
4. Hydraulic and mechanical safety claw locks involved  
配有液压锁和机械安全爪锁
5. Standard equipped with a handle, easy to slide the jack along the guide rail  
配有把手,方便小车在导轨内来回移动

## TECHNICAL DATA 技术参数

MODEL 型号	U-X20TD/X20TS/X20TQ	U-X30TD/X30TS/X30TQ
Capacity 举升重量	<b>2.0 Ton</b>	<b>3.0 Ton</b>
Lifting height 举升高度	485mm(19 1/10")	485mm(19 1/10")
Min height 平台高度	215mm(8 1/2 ")	215mm(8 1/2 ")
Platform length 平台长度	730mm(28 7/10")	730mm(28 7/10")
Telescopic arm stroke 伸缩臂行程	780-1600mm(30 7/10-63")	780-1600mm(30 7/10-63")

# U-M01 U-M02/M04

Motorcycle Lift  
摩托车举升机



**U-M01**

0.3 |



Standard Pneumatic Wheel Clamp (small)  
标配气动轮夹 (小)

**U-M02/M04**

0.5  
0.75 |



Standard Pneumatic Wheel Clamp (large)  
标配气动轮夹 (大)

- Pneumatic Lock Release**  
气动解锁
- Electromagnetic Lowering**  
电磁下降

## SAFETY FEATURES 安全特点



Height limit switch  
高度限位开关



Safety valve for anti-explosion of hydraulic system  
安全阀加强安全保护


## STANDARD 标准配置



Foot pedal for the pneumatic wheel clamp  
气动轮夹脚踏



Magnet controller, convenient for storing  
控制盒带磁铁, 便于收纳



Ramp Assembly  
翻转式上车板



Control box  
控制盒子



## OPTIONAL 可选配置





Optional (large) Automatic Wheel Clamp  
选配 (大) 自动轮夹

## DIMENSION 尺寸参数

### U-M01

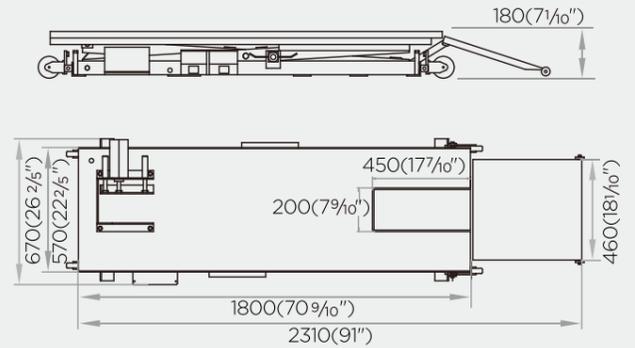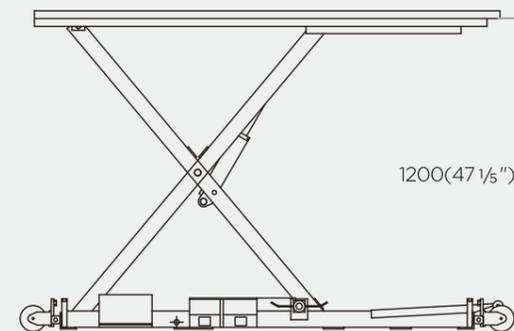

### U-M02/M04

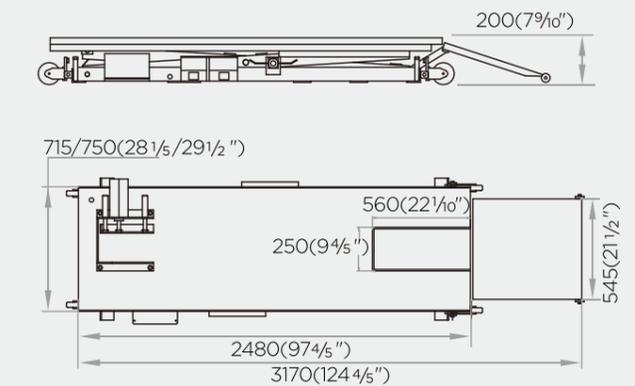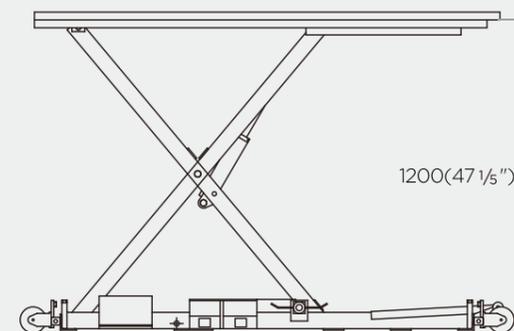

## TECHNICAL DATA 技术参数

MODEL 型号	U-M01	U-M02/M04
Capacity 举升重量	0.3 Ton	0.5 / 0.75 Ton
Lifting height 举升高度	1200mm (47 1/5 ")	1200mm (47 1/5 ")
Min height 平台高度	180mm (7 1/10 ")	200mm (7 9/10 ")
Platform length 平台长度	1800mm (70 9/10 ")	2480mm (97 4/5 ")
Power supply 电源功率	110V/220V/230V/240V 1ph 0.75kw	110V/220V/230V/240V 1ph 0.75 kw

# U-M03 U-M09

Motorcycle Lift  
电动摩托车举升机



**Manual Lock Release**  
手动解锁

**Electromagnetic Lowering**  
电磁下降

## SAFETY FEATURES 安全特点



Height limit switch  
高度限位开关



Safety valve for anti-explosion of hydraulic system  
安全阀加强安全保护



Safety lock  
安全锁

## STANDARD 标准配置



Extension loading ramp, easy loading & never touching the exhaust pipe  
加长上车板, 便于上车, 不会碰到排气管



Magnet controller, convenient for storing  
控制盒带磁铁, 便于收纳



Drawer-type platform  
拖放式上车板




Tools groove for storing small parts, time saving and convenience  
工具槽, 方便维修机器时放小螺丝小零件

## OPTIONAL 可选配置




Hanger  
吊架



Side panel with loading board  
扩展台

## DIMENSION 尺寸参数

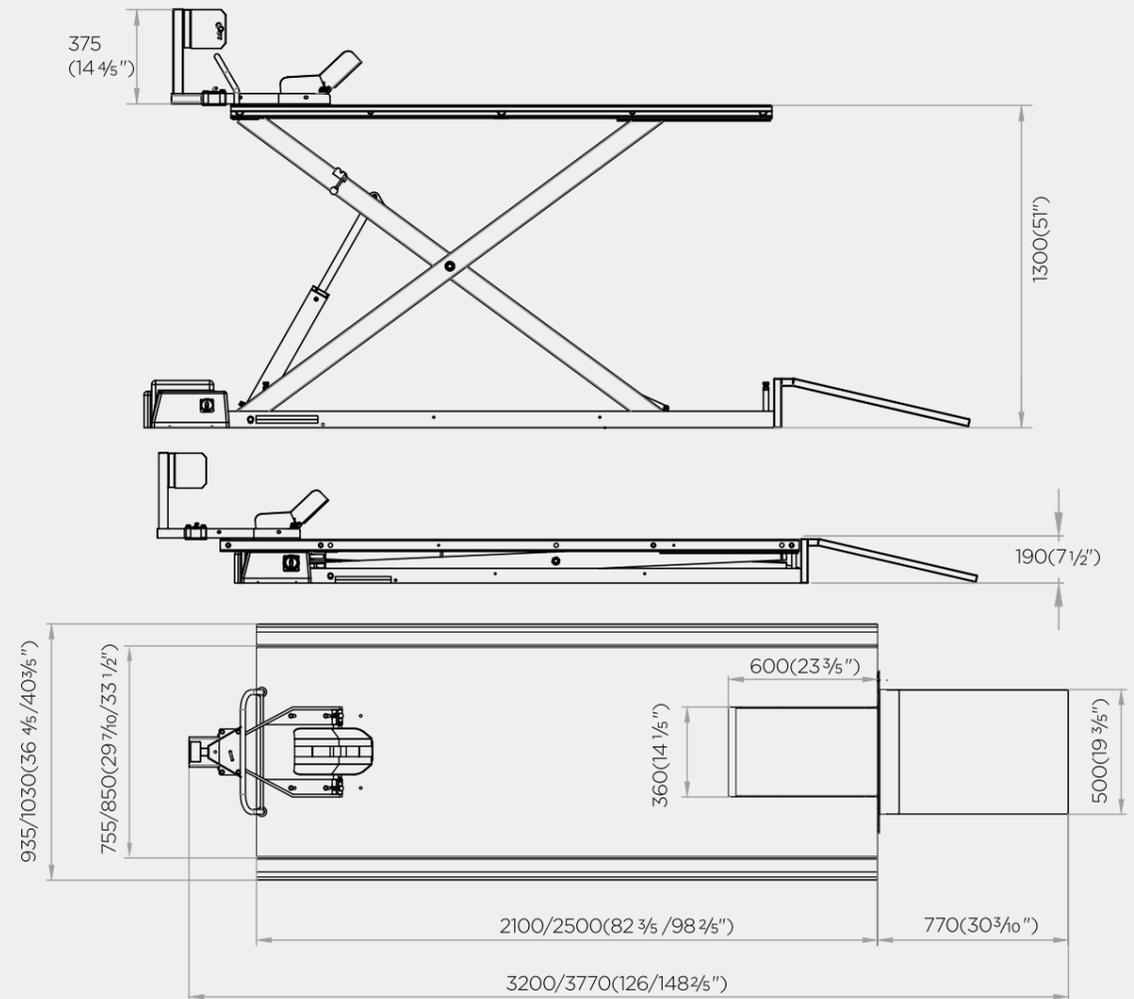


U-M03/U-M09

## TECHNICAL DATA 技术参数

MODEL 型号	U-M03	U-M09
Capacity 举升重量	0.5 Ton	0.7 Ton
Lifting height 举升高度	1300mm(51")	1300mm(51")
Min height 平台高度	190mm(7 1/2")	190mm(7 1/2")
Platform length 平台长度	2100mm(82 3/5")	2500mm(98 3/5")
Power supply 电源功率	110V/220V/230V/240V 1ph 0.75kw	110V/220V/230V/240V 1ph 1.1 kw

# U-M08 U-M10

Motorcycle Lift  
超薄式摩托车举升机

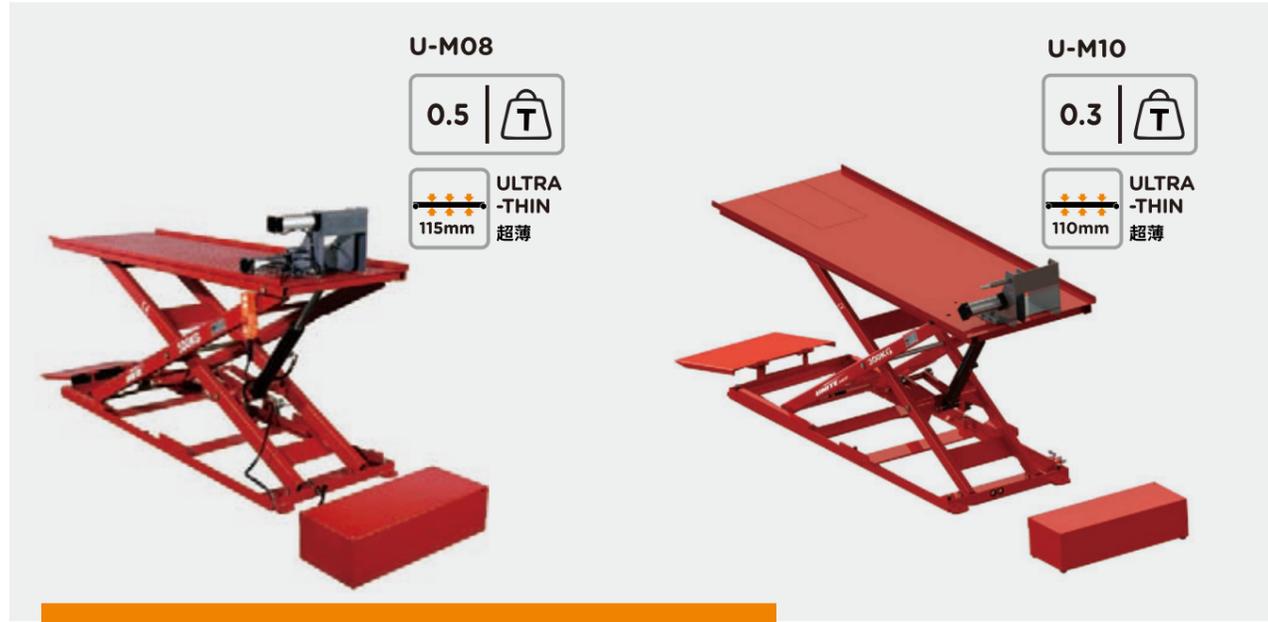

Electric Lock Release  
电动解锁

Electromagnetic Lowering  
电磁下降

## SAFETY FEATURES 安全特点



Height limit switch  
高度限位开关



Safety valve for anti-explosion of hydraulic system  
安全阀加强安全保护


## STANDARD 标准配置



Foot pedal for the pneumatic wheel clamp  
气动轮夹脚踏



Magnet controller, convenient for storing  
控制盒带磁铁, 便于收纳



Ramp Assembly  
翻转式上车板



Integrated power unit  
综合动力单元




U-M08  
Pneumatic Wheel Clamp (large)  
标配气动轮夹 (大)



U-M10  
Pneumatic Wheel Clamp (small)  
标配气动轮夹 (小)

## DIMENSION 尺寸参数

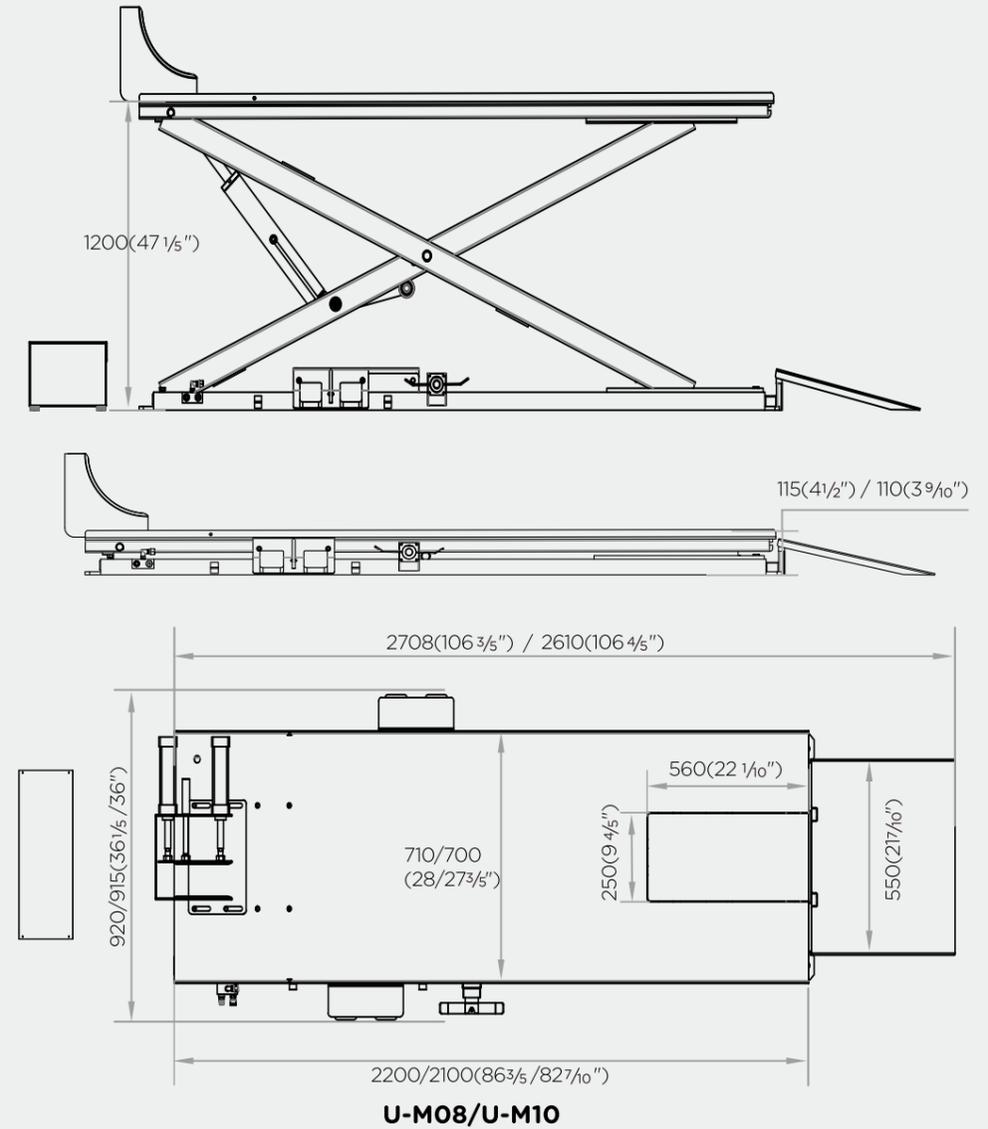

## TECHNICAL DATA 技术参数

MODEL 型号	U-M08	U-M10
Capacity 举升重量	0.5 Ton	0.3 Ton
Lifting height 举升高度	1200mm(47 1/5 ")	1200mm(47 1/5 ")
Min height 平台高度	115mm(4 1/2 ")	110mm(4 3/10 ")
Platform length 平台长度	2200mm(86 3/5 ")	2100mm(82 7/10 ")
Power supply 电源功率	110V/220V/230V/240V 1ph 0.75kw	110V/220V/230V/240V 1ph 0.75 kw

# U-FS35/FS35D/FS40 U-FS45/FS50/FS55

Four post vehicle lift for wheel alignment  
四轮定位四柱举升机



(CE: ONLY FOR U-FS35/FS40/FS45/FS55)



3.5  
4.0  
4.5  
5.0  
5.5

- Single Manual Lock Release**  
单边手动解锁
- For Wheel Alignment**  
四轮定位
- Optional Pneumatic Lock Release**  
选配 气动解锁

## Rolling jack (OPTIONAL) 二次小车 (可选配置) 2T/3T

Convenient for clients' self-installation  
方便客户自行安装



Manual Control  
手动小车



Pneumatic Control  
气动小车

FS35 FS35D FS40 FS45 --U-X20TS/X20TQ  
FS50 FS55 --U-X30TS/X30TQ  
FS35 FS35D FS40 FS45 推荐U-X20TS/X20TQ,  
FS50 FS55 推荐U-X30TS/X30TQ

## OPTIONAL 可选配置



Position-adjustable  
转角盘,位置可调



Drive-by-wire button  
线控按钮




Power unit cover +  
chain protector for oil  
hose  
动力单元罩子+油管保护  
坦克链

## SAFETY FEATURES 安全特点



Big Pulley for  
steel rope  
大钢丝滚轮



Safety valve for  
anti-explosion of  
hydraulic system  
安全阀加强安全保护





Abrasion resistant  
slip plates for 4  
wheel alignment  
四轮定位耐磨侧滑配置





Equipped with main  
insurance and rope  
break insurance on  
each column  
每个立柱设有主保险和  
断绳保险

## DIMENSION 尺寸参数

### U-FS35/FS35D/FS40

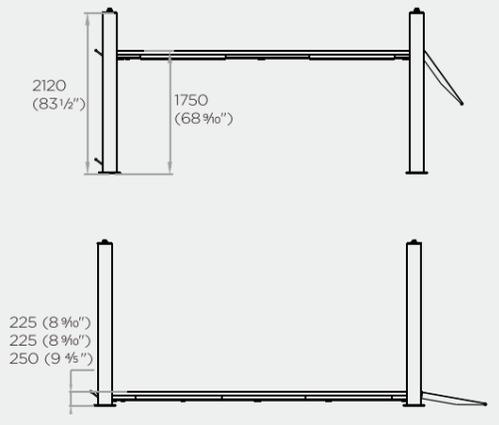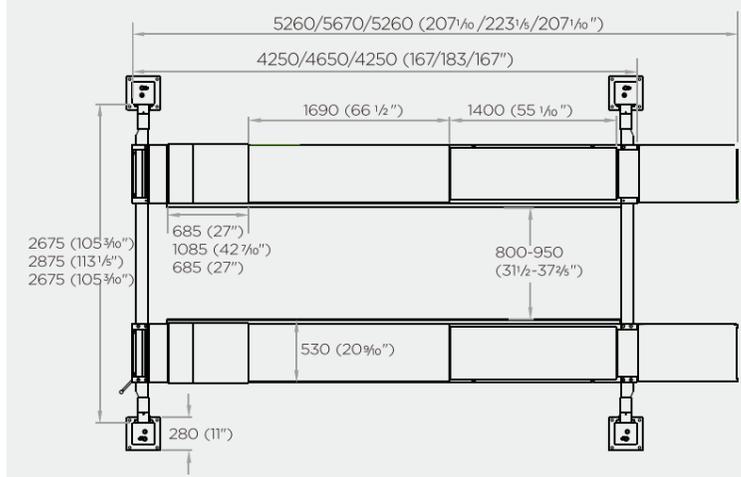

### U-FS45/FS50/FS55

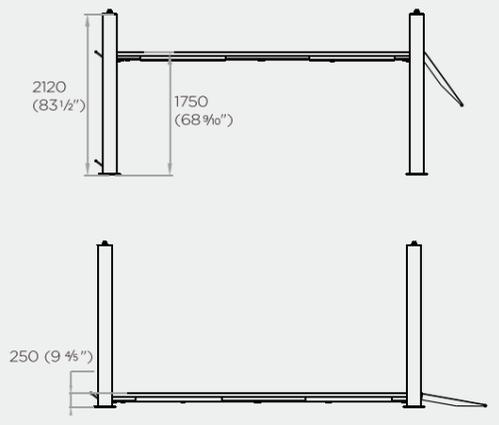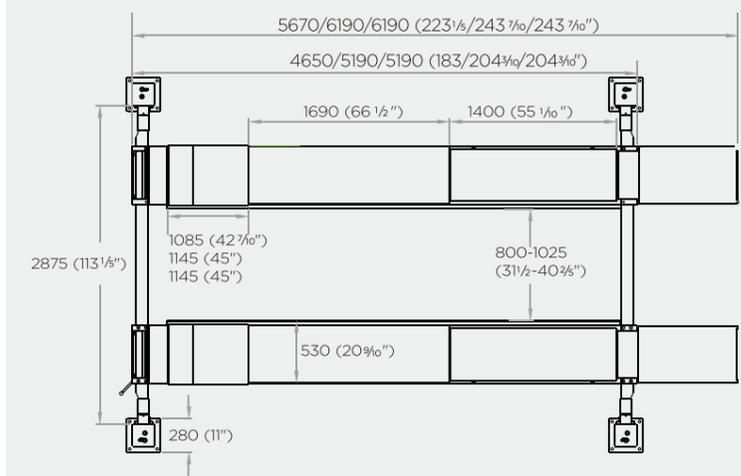

## TECHNICAL DATA 技术参数

MODEL 型号	U-FS35/FS35D/FS40	U-FS45/FS50/FS55
Capacity 举升重量	3.5 / 3.5 / 4.0 Ton	4.5 / 5.0 / 5.5 Ton
Lifting height 举升高度	1750mm(69")	1750mm(69")
Min height 平台高度	225/225/250mm(8 9/16 / 8 9/16 / 9 7/8 ")	250mm(9 7/8 ")
Platform length 平台长度	4250/4650/4250mm(167/183/167")	4650/5190/5190mm(183/204/204")
Power supply 电源功率	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW

# U-F35/F40/F45 U-F50/F55

Four Post Vehicle Lift  
平板四柱举升机



(CE: ONLY FOR U-F35/F40/F45/F55)



3.5  
4.0  
4.5  
5.0  
5.5

- Single Manual Lock Release  
单边手动解锁
- Optional Pneumatic Lock Release  
选配气动解锁

## Rolling jack (OPTIONAL) 二次小车 (可选配置) 2T/3T

Convenient for clients' self-installation  
方便客户自行安装



Manual Control 手动小车  
Pneumatic Control 气动小车  
Electric Control 电动小车


F35 F40 F45 --U-X20TD/X20TS/X20TQ  
F50 F55 --U-X30TD/X30TS/X30TQ  
F35 F40 F45 推荐U-X20TD/X20TS/X20TQ  
F50 F55 推荐U-X30TD/X30TS/X30TQ

## OPTIONAL 可选配置



Drive-by-wire button 线控按钮  
Power unit cover + chain protector for oil hose 动力单元罩子+油管保护坦克链


## SAFETY FEATURES 安全特点

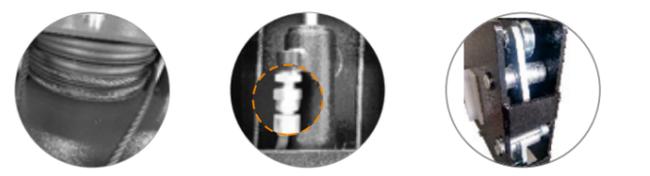


Big Pulley for steel rope 大钢丝滚轮  
Safety valve for anti-explosion of hydraulic system 安全阀加强安全保护  
Equipped with main insurance and rope break insurance on each column 每个立柱设有主保险和断绳保险

## DIMENSION 尺寸参数

### U-F35/F40/F45

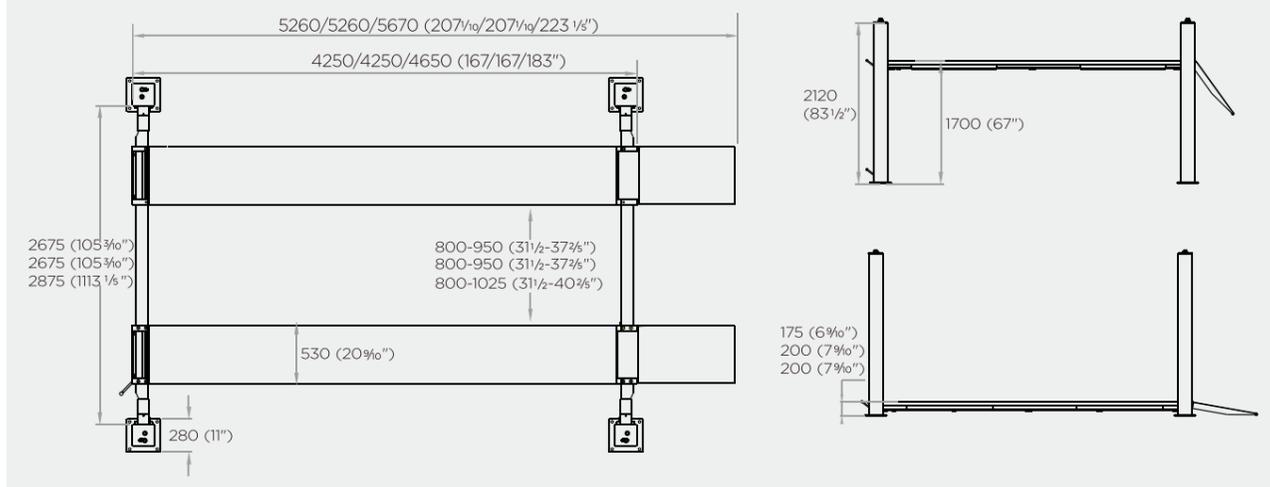

### U-F50/F55

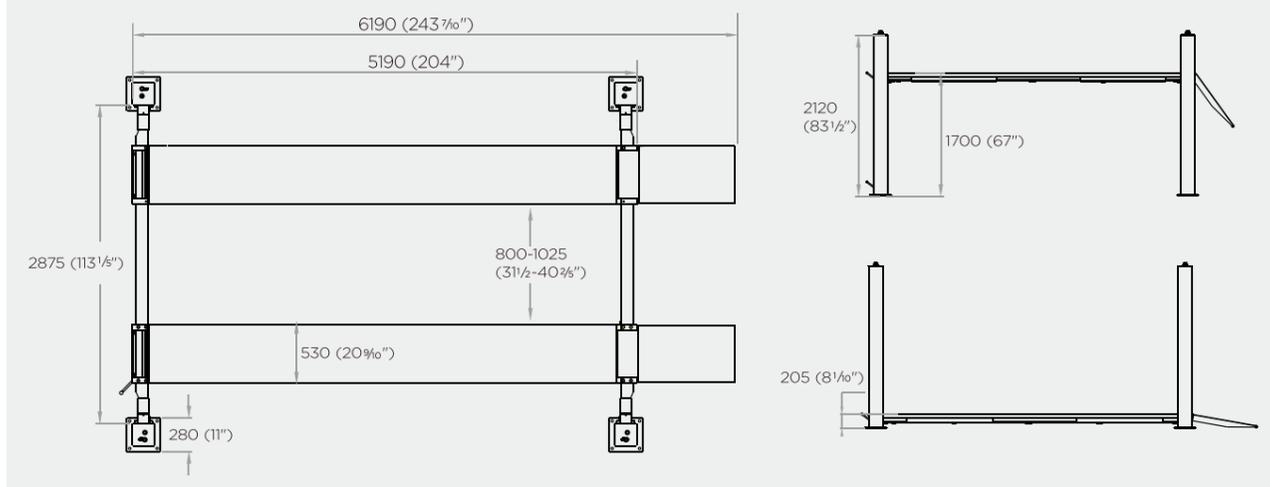

## TECHNICAL DATA 技术参数

MODEL 型号	U-F35/F40/F45	U-F50/F55
Capacity 举升重量	3.5 / 4.0 / 4.5 Ton	5.0 / 5.5 Ton
Lifting height 举升高度	1700mm(67")	1700mm(67")
Min height 平台高度	175/200/200mm(6 9/16/7 9/16/7 9/16")	205mm(8 1/16")
Platform length 平台长度	4250/4250/4650mm (167/167/183")	5190mm (204")
Power supply 电源功率	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW	220V 1PH 50/60Hz 2.2KW 220/380V 3PH 50/60Hz 2.2KW