


# WASTE OIL DRAINER/ EXTRACTOR

抽接油机



## GREASE DISPENSER 黄油加注机

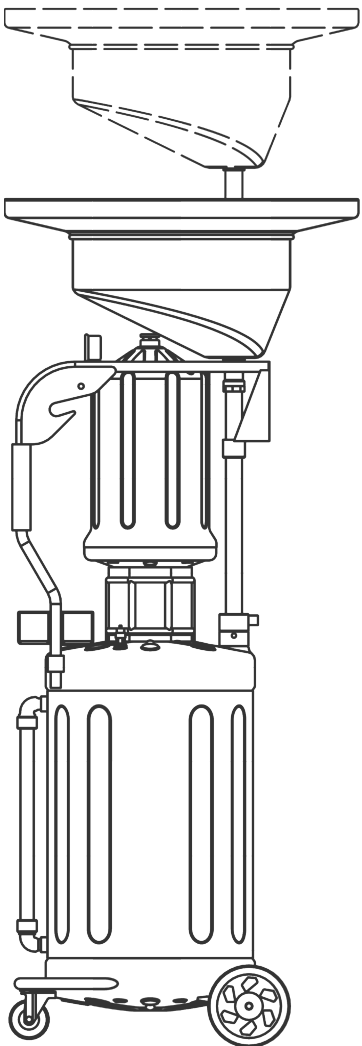

HG-68012  
Manual

HG-68213  
pneumatic

HG-68030H  
Manual

HG-68030A  
pneumatic

### PARAMETERS 参数

| Model 型号                 | HG-68012                   | HG-68213                         | HG-68030H     | HG-68030A     |
|--------------------------|----------------------------|----------------------------------|---------------|---------------|
| Tank capacity 储液罐体容积     | 13kg                       | 13kg                             | 30L           | 30L           |
| Air Inlet Pressure 进气口压力 | /                          | 6-8bar/85-115psi                 | /             | 6bar/85psi    |
| Output Pressure 输出压力     | Manual                     | 300-400/4350-5800                | Manual        | 50:1          |
| Size Of Pipe 输油管长        | 1/4"X4M                    | 1/4"X4M                          | 1/4"X3M       | 1/4"X2M       |
| Pump Ratio 泵比            | Manual pump                | 50:1                             | Manual pump   | 50:1          |
| Delivery Speed 流量        | Depends Of Strength of Use | 400-600G/Min;<br>0.88-1.76Lb/Min | 5G/Stroke     | 80g/min       |
| N/G weight 净重/毛重         | 8/9.5 kgs                  | 12/14 kgs                        | 10/11 kgs     | 10/11 kgs     |
| Package dimension 单件包装尺寸 | 370*350*780mm              | 370*350*850mm                    | 405*405*610mm | 375*375*815mm |

WASTE OIL DRAINER/EXTRACTOR

抽接油机

PNEUMATIC-LINE

气动

FEATURES 产品特点

- Modular cylinder  
Enhanced idensity  
More reliable material,  
Max.working temperature 120℃  
Special structure reduces leakage problem  
模块化气缸  
更可靠的材料，最大化的工作  
温度120℃特殊结构  
减少泄漏问题
- Vacuum generator  
Smart design,30% higher  
efficiency than other brands.  
真空发生器  
智能设计,效率比30%高其他品牌



HC-3026



HC-3027

PARAMETERS 参数

| Model 型号                                                                 | HC-3026                       | HC-3027                   |
|--------------------------------------------------------------------------|-------------------------------|---------------------------|
| Aank capacity 储液罐体容积                                                     | 30Liter/8US Gallon            |                           |
| Aair Inlet Pressure 进气压力（抽真空）                                            | 6-8bar/85-115psi              |                           |
| Air Inlet Connection 进气口接口                                               | 1/4"                          |                           |
| Vacuum Degree 真空度                                                        | 0-0.1 bar                     |                           |
| Air Pressure for Oil Discharge 排油压力                                      | 0.7-1bar/10-14psi             |                           |
| Oil Temperature Range 抽油温度                                               | 40-60℃                        |                           |
| Suction Speed@Probe 抽油速度 @抽油针管直径Ø8 dia. Ø8 & Oil 60℃(max.) 及油温60℃情况下（最大） | 6.5Liter/m<br>US 1.72Gallon/m |                           |
| Modular Cylinder Capacity (practicable/total) 透明量杯容积（可用/总）               | /                             | 9/10Liter(2.4/2.6Gallon)  |
| N/G weight 净重 / 毛重                                                       | 13/14.5 kgs                   | 16/18 kgs                 |
| Package dimension 单件包装尺寸                                                 | 370*355*920mm                 | 370*355*920/270*270*575mm |

WASTE OIL DRAINER/EXTRACTOR

抽接油机

ELECTRIC-LINE

电动

PROFESSIONAL

豪华款



HD-2330

HD-2350

HD-2380

HD-2390

PARAMETERS 参数

| Model 型号                                                   | HD-2330                    | HD-2350                    | HD-2380                    | HD-2390                    |
|------------------------------------------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| Tank capacity 储液罐体容积                                       | /                          | /                          | 50Liter/13US Gallon        | 50Liter/13US Gallon        |
| Power supply 电源                                            | AC220V/50HZ/1PH            |                            |                            |                            |
| Power 功率                                                   | ≤370W                      |                            |                            |                            |
| Oil ejection pressure 排油压力                                 | 0.5bar/7psi                |                            |                            |                            |
| Oil Temperature Range 抽油温度                                 | 40-60℃                     |                            |                            |                            |
| Suction Speed(max) 吸力速度                                    | 1.5-2Liter/m/US            |                            | 0.4-0.5Gallon/m            |                            |
| Modular Cylinder Capacity (practicable/total) 透明量杯容积（可用/总） | 9/10 Liter( 2.4/2.6Gallon) | 11/12Liter(2.9/3.2 Gallon) | 9/10 Liter( 2.4/2.6Gallon) | 9/10 Liter( 2.4/2.6Gallon) |
| Collection Bowl Capacity 接油托盘                              | /                          | /                          | /                          | 16Liter/4.2US Gallon       |
| N/G weight 净重 / 毛重                                         | 19.5/20.5 kgs              | 22.5/25 kgs                | 32/35 kgs                  | 36/42 kgs                  |
| Package dimension 单件包装尺寸                                   | 420*300*895mm              | 450*450*980mm              | 500*455*1265mm             | 500*455*1265/450*450*300mm |

22 SERIES 系列  
WASTE OIL DRAINER/EXTRACTOR

抽接油机

PNEUMATIC-LINE  
气动

STANDARD  
标准款

FEATURES 产品特点



22 SERIES 系列  
WASTE OIL DRAINER/EXTRACTOR

抽接油机

PNEUMATIC-LINE  
气动

STANDARD  
标准款



PARAMETERS 参数

| Model 型号                                                                    | HC-2297                       | HC-2280                       | HC-2281              | HC-2285                       | HC-2290                       |
|-----------------------------------------------------------------------------|-------------------------------|-------------------------------|----------------------|-------------------------------|-------------------------------|
| Tank capacity 储液罐体容积                                                        | 80Liter/21US Gallon           | 80Liter/21US Gallon           |                      |                               |                               |
| Air Inlet Pressure 进气压力 (抽真空)                                               | 6-8bar/87-116psi              | 6-8bar/87-116psi              |                      |                               |                               |
| Air Inlet Connection 进气口接口                                                  | 1/4"                          | 1/4"                          |                      |                               |                               |
| Vacuum Degree 真空度                                                           | -1-0 bar                      | -1-0 bar                      |                      |                               |                               |
| Air Pressure for Oil Discharge 排油压力                                         | 0.7-1bar/10-15psi             | 0.7-1bar/10-15psi             |                      |                               |                               |
| Oil Temperature Range 抽油温度                                                  | 40-60°C                       | 40-60°C                       |                      |                               |                               |
| Suction Speed@Probe dia. Ø8 & Oil 60°C(max.) 抽油速度 @抽油针管直径Ø8 及油温60°C情况下 (最大) | 6.5Liter/m<br>US 1.72Gallon/m | 6.5Liter/m<br>US 1.72Gallon/m | /                    | 6.5Liter/m<br>US 1.72Gallon/m | 6.5Liter/m<br>US 1.72Gallon/m |
| Modular Cylinder Capacity (practicable/total) 透明量杯容积 (可用/总)                 | 9Liter/2.4US Gallon           | /                             | /                    | /                             | 9Liter/2.4US Gallon           |
| Collection Bowl Capacity 接油托盘                                               | 16Liter/4.2US Gallon          | /                             | 16Liter/4.2US Gallon | 16Liter/4.2US Gallon          | /                             |
| N/G weight 净重 / 毛重                                                          | 26.1/29.7 kgs                 | 18.5/21.5 kgs                 | 20.4/23.4 kgs        | 22.9/25.9 kgs                 | 22.2/25.8 kgs                 |
| Package dimension 单件包装尺寸                                                    | 560*440*1000/270*270*575mm    | 560*440*1000mm                | 560*440*1000mm       | 560*440*1000mm                | 560*440*1000/270*270*575mm    |



32 SERIES 系列  
WASTE OIL DRAINER/EXTRACTOR  
抽接油机

PNEUMATIC-LINE  
气动

PROFESSIONAL  
豪华款

FEATURES 产品特点



HC-3297

32 SERIES 系列  
WASTE OIL DRAINER/EXTRACTOR  
抽接油机

PNEUMATIC-LINE  
气动

PROFESSIONAL  
豪华款



HC-3285A



HC-3281



HC-3280



HC-3285



HC-3290



HC-3298

PARAMETERS 参数

| Model 型号                                                                    | HC-3297                       | HC-3285A                                                         | HC-3280                       | HC-3281              | HC-3285                       | HC-3290                       | HC-3298                       |
|-----------------------------------------------------------------------------|-------------------------------|------------------------------------------------------------------|-------------------------------|----------------------|-------------------------------|-------------------------------|-------------------------------|
| Tank capacity 储液罐体容积                                                        | 75Liter/20US Gallon           |                                                                  |                               |                      | 75Liter/20US Gallon           |                               |                               |
| Air Inlet Pressure 进气压力 (抽真空)                                               | 6-8bar/87-116psi              |                                                                  |                               |                      | 6-8bar/87-116psi              |                               |                               |
| Air Inlet Connection 进气口接口                                                  | 1/4"                          |                                                                  |                               |                      | 1/4"                          |                               |                               |
| Vacuum Degree 真空度                                                           | -1-0 bar                      |                                                                  |                               |                      | -1-0 bar                      |                               |                               |
| Air Pressure for Oil Discharge 排油压力                                         | 0.7-1bar/10-15psi             |                                                                  |                               |                      | 0.7-1bar/10-15psi             |                               |                               |
| Oil Temperature Range 抽油温度                                                  | 40-60°C                       | 40-80°C                                                          |                               |                      | 40-60°C                       |                               |                               |
| Suction Speed@Probe dia. Ø8 & Oil 60°C(max.) 抽油速度 @抽油针管直径Ø8 及油温60°C情况下 (最大) | 6.5Liter/m<br>US 1.72Gallon/m | 6.5Liter/m<br>US 1.72Gallon/m                                    | 6.5Liter/m<br>US 1.72Gallon/m | /                    | 6.5Liter/m<br>US 1.72Gallon/m | 6.5Liter/m<br>US 1.72Gallon/m | 6.5Liter/m<br>US 1.72Gallon/m |
| Modular Cylinder Capacity (practicable/total) 透明量杯容积 (可用/总)                 | 11/12Liter(2.9/3.2Gallon)     | /                                                                | /                             | /                    | /                             | 11/12Liter(2.9/3.2Gallon)     | 11/12Liter(2.9/3.2Gallon)     |
| Collection Bowl Capacity 接油托盘                                               | 20Liter/5.3US Gallon          | 48Liter/12.7US Gallon                                            | /                             | 20Liter/5.3US Gallon | 20Liter/5.3US Gallon          | /                             | 20Liter/5.3US Gallon          |
| N/G weight 净重 / 毛重                                                          | 31/36 kgs                     | 46/50 kgs                                                        | 19.5/23 kgs                   | 24.4/28 kgs          | 26/29.5kgs                    | 22/27 kgs                     | 42/47 kgs                     |
| Package dimension 单件包装尺寸                                                    | 550*445*1460mm                | Tank:560*510*1010, Tray:650*255*770<br>Support frame:1320*75*110 | 540*440*975mm                 | 550*450*1010mm       | 550*450*1010mm                | 555*445*1405mm                | 550*445*1460mm                |

40 SERIES 系列

WASTE OIL DRAINER/EXTRACTOR


抽接油机

PNEUMATIC-LINE


气动

FEATURES 产品特点

- ① 多规格抽油针管，满足大部分车型抽油  
5mm/6mm/7mm/8mm。  
Includes 4 probes to meet most popular vehicle types  
5mm/6mm/7mm/8mm.
- ② 移动保护支架，使用时省力便捷，配有工具/零件置物盒。  
Mobile design with a handrail and toolbox.
- ③ 无损伤升降杆锁紧机构，可调节任意位置。  
The lift pole is equipped with harmless locking device and adjustable.
- ④ 罐体使用2mm厚钢板，采用智能机械手焊接，罐体更坚固美观。  
The tank is made of 2mm thick steel plate and welded by welding robot for a solid and elegant result.  
Non-damage lifting rod locking mechanism, adjustable anywhere.
- ⑤ 加宽移动轮，方便移动。  
Wide caster for easy rolling.

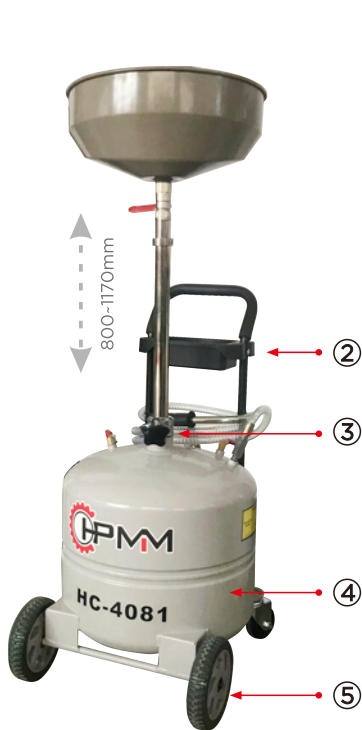

HC-4081

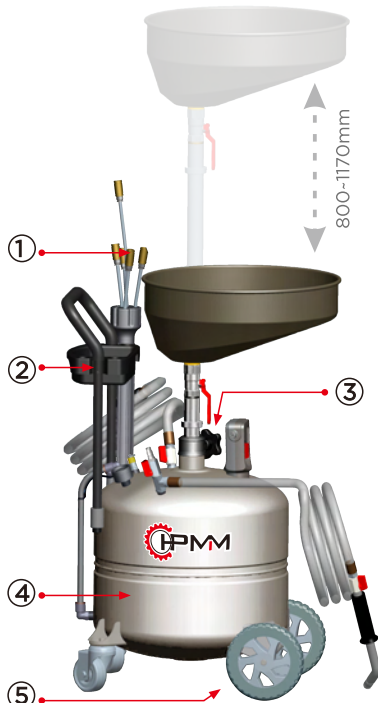

HC-4085

PARAMETERS 参数

| Model 型号                                                                   | HC-4081               | HC-4085                       |
|----------------------------------------------------------------------------|-----------------------|-------------------------------|
| Tank capacity 储液罐体容积                                                       | 40Liter/10.7US Gallon | 40Liter/10.7US Gallon         |
| Air Inlet Pressure 进气压力（抽真空）                                               | /                     | 6-8bar/87-116psi              |
| Air Inlet Connection 进气口接口                                                 | 1/4"                  | 1/4"                          |
| Vacuum Degree 真空度                                                          | /                     | -1-0 bar                      |
| Air Pressure for Oil Discharge 排油压力                                        | ≤1bar/≤15psi          | ≤1bar/≤15psi                  |
| Oil Temperature Range 抽油温度                                                 | 40-60°C               | 40-60°C                       |
| Suction Speed@Probe 抽油速度 @抽油针管直径Ø8 dia. Ø8 & Oil 60°C(max.) 及油温60°C情况下（最大） | /                     | 6.5Liter/m<br>US 1.72Gallon/m |
| Height 高度                                                                  | 800-1170mm            | 800-1170mm                    |
| Collection Bowl Capacity 接油托盘                                              | 16Liter/4.2US Gallon  | 16Liter/4.2US Gallon          |
| N/G weight 净重 / 毛重                                                         | 18.7/21.2 kgs         |                               |
| Package dimension 单件包装尺寸                                                   | 540*460*770mm         | 540*460*770mm                 |

42 SERIES 系列

WASTE OIL DRAINER/EXTRACTOR

抽接油机

PNEUMATIC-LINE

气动

PROFESSIONAL  
豪华款

FEATURES 产品特点

- ① Vacuum&Explosion-proof integrated mechanism (Patented) 抽真空&防爆一体机构（专利产品）
- ② Modular Cylinder(Patented) 透明量杯(专利产品)
- ③ Support stand 移动保护支架
- ④ Tool tray 工具箱
- ⑥ Oil display scale 液位显示管
- ⑦ Waste oil collection 残油收集杯
- ⑧ Oil tank(Patented) 罐体(已获外观专利)
- ⑨ Resistant PVC wheel PVC定向脚轮



HC-4298

PARAMETERS 参数

| Model 型号                                                                   | HC-4298                                      |
|----------------------------------------------------------------------------|----------------------------------------------|
| Theoretical/Actual Tank capacity 理论/实际罐体容积                                 | 90Liter/23.8US Gallon（85Liter/22.5US Gallon） |
| Air Inlet Pressure 进气压力（抽真空）                                               | 6-8bar/87-116psi                             |
| Air Inlet Connection 进气口接口                                                 | 1/4"                                         |
| Vacuum Degree 真空度                                                          | -1-0 bar                                     |
| Air Pressure for Oil Discharge 排油压力                                        | 0.7-1bar/10-15psi                            |
| Oil Temperature Range 抽油温度                                                 | 40-60°C                                      |
| Suction Speed@Probe 抽油速度 @抽油针管直径Ø8 dia. Ø8 & Oil 60°C(max.) 及油温60°C情况下（最大） | 6.5Liter/m<br>US 1.72Gallon/m                |
| Modular Cylinder Capacity (practicable/total) 透明量杯容积（可用/总）                 | 11(2.9Gallon)                                |
| Collection Bowl Capacity 接油托盘                                              | 20Liter/5.3US Gallon                         |
| N/G weight 净重 / 毛重                                                         | 47/53 kgs                                    |
| Package dimension 单件包装尺寸                                                   | 555*440*1565mm                               |